

30 January 2025

# Aurum hits 150 g/t gold at Boundiali, Côte d'Ivoire

Aurum Resources (ASX: AUE) reports further exceptional high-grade gold intercepts from its 1.59Moz Boundiali Gold Project in Côte d'Ivoire.

# Highlights

- Exploration diamond drilling (17 holes for 4,550m) targeting multiple prospects on the Boundiali BM tenement returns shallow, wide and high-grade gold hits<sup>1</sup> including:
  - o 1m @ 150.50 g/t Au within 3m @ 50.56 g/t Au from 124m (MBDD130)
  - o **2m @ 63.55 g/t Au** from 111m inc. **1m @ 110.95 g/t Au** & **23m @ 2.04 g/t Au** from 118m (MBDD123)
  - o 1m @ 9.28 g/t Au from 65m & 1m @ 58.39 g/t Au from 71m (MBDD121)
- These results demonstrate the emerging potential and continued upside of the Boundiali project, with mineralisation remaining open along strike and at depth.
- Aurum's six self-owned diamond rigs continue to drill at Boundiali with 100,000m targeted in CY2025
- Two MRE updates planned in CY2025 to grow the maiden 1.59Moz Boundiali Mineral Resource Estimate<sup>2</sup>
- Aurum's takeover of Mako Gold (ASX: MXG)<sup>3</sup> moves to compulsory acquisition the merged company
  has 2.47Moz of gold resources and aggressive cost-effective drilling is planned to drive resource growth
- Aurum is well-funded<sup>4</sup> (~\$23M cash at bank) for continued exploration success.

**Aurum's Managing Director Dr. Caigen Wang** said: "I am excited to announce new shallow high-grade gold intercepts at our Boundiali project. Drilling at the BM Target 3 (BMT3) continues to deliver with MBDD130 intersecting **1m @ 150.50 g/t Au within 3m @ 50.56 g/t Au** and MBDD123 returning **2m @ 63.55 g/t Au**, **including 1m @ 110.95 g/t Au**. These results reinforce the exceptional potential of BMT3, which already boasts a project-best intercept of **1.19m @ 277.54 g/t Au** from hole MBDD118, and we remain confident that similar intercepts are foreseeable.

Importantly, these latest hits will be included in the next Boundiali Mineral Resource Estimate (MRE) update expected in the first half of this year. This update will build on Boundiali's current **1.59Moz MRE** and incorporate results from our ongoing 100,000m diamond drilling campaign in 2025. We expect another resource update in the second half of this year, including results from drilling at the BD, BM, and BST deposits, as well as numerous untested gold-in-soil anomalies. Our exploration efforts are aimed at delivering significant resource growth at Boundiali in 2025 and beyond, ultimately feeding into a Pre-Feasibility Study (PFS) expected at the end of the year.

At our Napié project, we're planning an aggressive 30,000m diamond drilling program in 2025 to expand the current **0.87Moz MRE**<sup>5</sup>. An updated MRE for Napié is expected by year-end.

 $<sup>^{1}</sup>$  Refer to Table 1 for collar information and Table 2 for assay results for the BM drilling

<sup>&</sup>lt;sup>2</sup> "Aurum delivers 1.6Moz Maiden JORC Resource at Boundiali Gold Project" released to the Australian Securities Exchange on 30 December 2024 and amended on 31 December 2024 and available to view on www.asx.com.au

 $<sup>^{3}</sup>$  ASX 24 January 2025; Compulsory Acquisition Notice Mako Takeover

 $<sup>^{\</sup>rm 4}$  ASX 6 December 2024; AUE receives firm commitments for A\$10 million placement

<sup>&</sup>lt;sup>5</sup> "Mako Delivers 868koz Maiden Resource to Provide Strong Growth Platform at Napié" released to the Australian Securities Exchange on 14 June 2022 and available to view on www.asx.com.au



This is an exciting time for Aurum shareholders. With a combined **2.5Moz** of gold across Boundiali and Napié, and a substantial drilling program planned for both projects, we are well positioned for significant resource growth and further value creation in 2025."

## **BM - Latest Drill Results**

Aurum reports results for 17 holes for 4,550m of diamond core drilled at its BM tenement including at **BM** Target 1 (2 holes for 938.50m) and **BM** Target 3 (15 holes for 3,611.50m), part of an expanded drill program at **BM** where Aurum holds an 80% project interest<sup>6</sup>.

Best results for the new holes<sup>7</sup> include:

### BM Target 1

- 6m @ 1.19 g/t Au from 397 m inc. 1m @ 5.28 g/t Au (MBDD117)
- 9m @ 1.33 g/t Au from 386 m inc. 6m @ 1.69 g/t Au (MBDD120).

#### BM Target 3

- 1m @ 150.50 g/t Au within 3m @ 50.56 g/t Au from 124m (MBDD130)
- 2m @ 63.55 g/t Au from 111m inc. 1m @ 110.95 g/t Au & 23m @ 2.04 g/t Au from 118m (MBDD123)
- 1m @ 9.28 g/t Au from 65m & 0.98m @ 58.39 g/t Au from 71m (MBDD121)
- 4m @ 4.18 g/t Au from 142m (MBDD125A)
- 8m @ 1.00 g/t Au from 83m inc. 5m @ 1.40 g/t Au & 11m @ 1.42 g/t Au from 98m inc. 5m @ 2.59 g/t Au (MBDD126).

These new results are in addition to diamond holes drilled and reported<sup>8</sup> by Aurum at **BM**, which included:

- 1.19m @ 277.54 g/t Au from 31m (MBDD118)
- 1m @ 73.77 g/t Au from 38m & 12m @ 2.14 g/t Au from 43m & 6m @ 4.46 g/t Au from 56m & 15m
   @ 1.17 g/t Au from 132m (MBDD112)
- 20m @ 1.61 g/t Au from 60m & 5m @ 2.76 g/t Au from 82m & 5m @ 3.12 g/t Au from 91m & 6m @ 3.81 g/t Au from 98m (MBDD114)
- 11.46m @ 6.67 g/t Au from 162.54m incl. 1.46m @ 45.04 g/t Au (MBDD049)
- 45m @ 0.93 g/t Au from 78m incl. 8m @ 1.18 g/t Au from 78m & 25m @ 1.15 g/t Au from 98m (MBDD0045)
- 17.31m @ 5.90 g/t Au from 273.69m inc. 6m @ 16.07 g/t Au (MBDD081)
- 29m @ 1.55 g/t Au from 178m inc. 13m @ 2.19 g/t Au (MBDD086).
- 1m @ 35.86 g/t Au from 82m & 4.25m @ 3.75 g/t Au from 120m (MBDD070)
- 16m @ 1.24 g/t Au from 117m incl. 6m @ 2.44 g/t Au (MBDD0010)
- **7.39m @ 1.94 g/t Au** from 139.34m incl. **5.35m @ 2.53 g/t Au** (MBDD017)
- 16.3m @ 1.02 g/t Au from 86.7m incl. 8m @ 1.71 g/t Au (MBDD019)
- 16.64m @ 1.45 g/t Au from 56.26m incl. 10.40m @ 2.11 g/t Au (MBDD007)
- 5m @ 4.73 g/t Au from 53.5m incl. 1.10m @ 20.35 g/t Au (MBDD004).

<sup>&</sup>lt;sup>6</sup> Refer to About Aurum's Boundiali Gold Project

\_

Refer to Table 1 for collar information and Table 2 for assay results for the BM drilling 8 Refer to Compliance Statement for details on previous reporting on ASX



Aurum's geologists used information from previous drilling and field mapping to identify these prospects, which include some large artisanal pits. **BM** Target 3 NW has delivered project best intercept (**1.19m @ 277.54 g/t Au** from 31m, MBDD118). True widths for these shallow wide and high-grade gold intercepts are estimated at about 70% - 80% of reported downhole lengths.

Details of drill collar location and assay results for the new drilling at **BM** can be found in **Table 1** and **Table 2** respectively. Plans showing location of the Boundiali Gold Project and the assay results are presented in figures below (general locations in **Figure 1** and **Figure 2** and a detailed plan in **Figure 3**). A cross section showing the latest drill results is presented in **Figure 4**.

Gold mineralisation remains open along strike and at depth on all prospects, with drilling ongoing and Aurum is planning further work to follow up these initial results.

#### Boundiali - 100,000m drill program

Aurum is planning an extensive 100,000m diamond drilling program in 2025 at its 1.59Moz Boundiali Gold Project in northern Côte d'Ivoire. The program<sup>9</sup> has multiple aims: to increase the size and confidence of current resources at BST, BD, and BM (40,000m), and to advance known prospects (30,000m) for incorporation into two planned resource updates in 2025. Additionally, about 30,000m of drilling will target new prospects identified through soil anomalies and geological mapping to drive resource growth into 2026.

#### **Next Steps:**

- Aggressive Cost-effective Exploration at Boundiali: Aurum is committed to a large-scale exploration program at Boundiali. This includes:
  - 100,000m Diamond Drilling: Six diamond drill rigs will complete 100,000m of drilling at Boundiali in CY2025.
  - o Resource Expansion: Drilling will expand the known resources at the BST, BD, and BM deposits.
  - New Discoveries: Exploration and scout drilling is planned on BM, BM and BST tenements to test new targets and create a pipeline of new discoveries to flow into resource growth.
- Resource Updates: Aurum plans to deliver two MRE updates for Boundiali in CY2025.
- Napié Project Development: A 30,000m diamond drilling program is planned for the Napié project in CY2025 to expand the existing 0.87Moz resource. An updated MRE for Napié is expected by year-end.
- Pre-Feasibility Study: Aurum is working towards completing a PFS for the Boundiali Gold Project by the
  end of CY2025. This will provide a more detailed evaluation of the project's economics and technical
  feasibility.
- **Continued Growth:** With a strong financial position (~\$23M cash at bank at the end of December 2024), Aurum is well-funded to execute these exploration and development plans. The company remains focused on delivering value for shareholders through resource growth and project advancement.

<sup>&</sup>lt;sup>9</sup> This program is indicative only and subject to change based on operational requirements and exploration results. Meterage allocations may be adjusted as new information becomes available. Investors should refer to company announcements for updates on the drilling program and be aware of the inherent risks associated with mineral exploration.



### Aurum's takeover of Mako Gold Limited

On 24 January 2025, Aurum advised that with a relevant interest in 90.23% of Mako shares, it would proceed to compulsory acquisition and the ASX will suspend quotation of Mako shares in accordance with ASX Listing Rule 17.4. Aurum launched its takeover bid on 16 October 2024 and the offer will close on 31 January 2025 at 7.00pm (Sydney time).

This update has been authorised by the Board of Aurum Resources Limited.

#### **ENDS**

#### FORWARD-LOOKING STATEMENTS

This ASX release contains forward-looking statements about Aurum Resources Limited's exploration activities, drilling programs, and potential Mineral Resource Estimate at the Boundiali and Napié Gold Projects. These statements are based on current expectations and are subject to risks and uncertainties inherent in mineral exploration and mining. Factors that could cause actual results to differ materially include exploration risks, drilling results, resource estimation, gold prices, operational risks, regulatory changes, and broader economic conditions. Investors should not place undue reliance on these forward-looking statements.

#### COMPETENT PERSONS STATEMENT

The information in this release that relates to Exploration Targets and Exploration Results is based on information compiled by Mr Mark Strizek, a Competent Person who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Strizek has been a non-executive Director of the Company since 1 February 2024 and joined as an executive Director on 1 June 2024. Mr Strizek has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaking to qualify as a Competent Person as defined in the 2012 edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Strizek consents to the inclusion in the announcement of the matters based on his information in the form and context in which it appears. Additionally, Mr Strizek confirms that the entity is not aware of any new information or data that materially affects the information contained in the ASX releases referred to in this presentation.

## **COMPLIANCE STATEMENT**

The information in this report that relates to Boundiali Mineral Resources is extracted from the announcement "Aurum delivers 1.6Moz Maiden JORC Resource at Boundiali Gold Project" released to the Australian Securities Exchange on 30 December 2024 and amended on 31 December 2024 and available to view on www.asx.com.au. The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and, in the case of estimates of Mineral Resources, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

The information in this report that relates to Napié Mineral Resources is extracted from the announcement "Mako Delivers 868koz Maiden Resource to Provide Strong Growth Platform at Napié" released to the Australian Securities Exchange on 14 June 2022 and available to view on www.asx.com.au. The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and, in the case of estimates of Mineral Resources, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

This report contains information extracted from ASX market announcements reported in accordance with the 2012 edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves" ("2012 JORC Code") and available for viewing at www.asx.com.au and includes results reported previously and published on ASX platform:

24 Jan 2025, Compulsory Acquisition Notice Mako Takeover (ASX:AUE)
24 Jan 2025, Non Binding MoU with SANN Heavy Equipment Co (ASX:AUE)
23 Jan 2025, Change in substantial holding for MKG (ASX:AUE)
9 Jan 2025, Best and Final offer for Mako Gold Limited (ASX:AUE)
31 Dec 2024, Boundiali Project Maiden Resource delivers 1.6 Maz (amended) (ASX:AUE)
30 Dec 2024, Boundiali Gold Project Maiden Resource delivers 1.6 Maz (ASX:AU)
24 Dec 2024, Change in substantial holding for MKG (ASX:AUE)
33 Dec 2024, AUE achieves in excess of 95% gold recoveries from Boundiali (ASX:AUE)
18 Dec 2024, Aurum hits 277 g/t gold at Boundiali BM Target 3
13 Dec 2024, Change of pirectors and Addition of Joint Company Secretary (ASX:AUE & ASX:MKG)
6 Dec 2024, AUE receives firm commitments for A\$10 million placement (ASX:AUE)
29 Nov 2024, Aurum earns 80% interest in Boundiali BM tenement (ASX:AUE)
28 Nov 2024, AUE appoints Mr. Steve Zaninovich as Non-Executive Director (ASX:AUE)
22 Nov 2024, AUE Declares Takeover Offer for all MKG Shares Unconditional (ASX:AUE)

15 Nov 2024, Supplementary Bidders Statement (ASX:AUE)



11 Nov 2024, Aurum hits 36 g/t gold at BM T1 of 2.5km strike (ASX:AUE)

30 Oct 2024, Bidders Statement (ASX:AUE)

16 Oct 2024, Recommended Takeover of Mako Gold By Aurum Resources (ASX:AUE)

09 Sep 2024, Aurum earns 51% interest in Boundiali BM tenement (ASX:AUE)

05 Sep 2024, AUE hits 40m at 1.03 g/t gold at Boundiali BD Target 1 (ASX:AUE)

03 Sep 2024, Boundiali South Exploration Licence Renewed (ASX:AUE)

07 Aug 2024, Aurum to advance met studies for Boundiali Gold Project (ASX:AUE)

22 July 2024, Prelim metallurgical tests deliver up to 99% gold recovery (ASX:AUE) 17 June 2024, Aurum hits 69m at 1.05 g/t gold at Boundiali BD Target 1 (ASX:AUE)

28 May 2024, AUE hits 163 g/t gold in 12m @ 14.56 g/t gold at BD Target 1 (ASX:AUE)

28 May 2024, AUE hits 163 g/t gold in 12m @ 14.56 g/t gold at BD larget 1 (ASX:A 24 May 2024, Aurum hits 74m @ 1.0 g/t gold at Boundiali BD Target 2 (ASX:AUE)

15 May 2024, Aurum expands Boundiali Gold Project footprint (ASX:AUE)

10 May 2024, AUE hits 90m @ 1.16 g/t gold at Boundiali BD Target 1 (ASX:AUE)

01 May 2024, Aurum Appoints Country Manager in Côte d'Ivoire (ASX:AUE)

23 April 2024, AUE drilling hits up to 45 g/t gold at Boundiali BD Target 2 (ASX:AUE)

19 March 2024, AUE signs binding term sheet for 100% of Boundiali South (ASX:AUE)

12 March 2024, AUE hits 73m at 2.15g/t incl 1m at 72g/t gold at Boundiali (ASX:AUE)

01 March 2024, Aurum hits 4m at 22 g/t gold in Boundiali diamond drilling (ASX:AUE)

22 January 2024, Aurum hits shallow, wide gold intercepts at Boundiali, Côte d'Ivoire (ASX: AUE)

21 December 2023, Rapid Drilling at Boundiali Gold Project (ASX.AUE)

21 November 2023, AUE Acquisition Presentation (ASX.AUE)

21 June 2021, Notice of General Meeting/Proxy Form (MSR.ASX)

21 May 2021, PlusOr to Acquire 6194 sq kms Ground Position in Côte d'Ivoire (MSR.ASX)

22 August 2019, Boundiali RC Drill Results Continue to Impress (PDI.ASX)

15 July 2019. RC. Trench Results Grow Boundiali Potential In Côte D'Ivoire (PDI.ASX)

27 May 2019, New Drill Results Strengthen Boundiali Project Côte D'Ivoire (PDI.ASX

16 January 2019, PDI-Toro JV Sharpens Focus with Major Drilling Program (PDI.ASX)
26 November 2018, Boundiali North - Large Coherent Gold Anomalies in 14km Zone (PDI.ASX)

The Company confirms that it is not aware of any new information or data that materially affects the information included in the previous announcements.



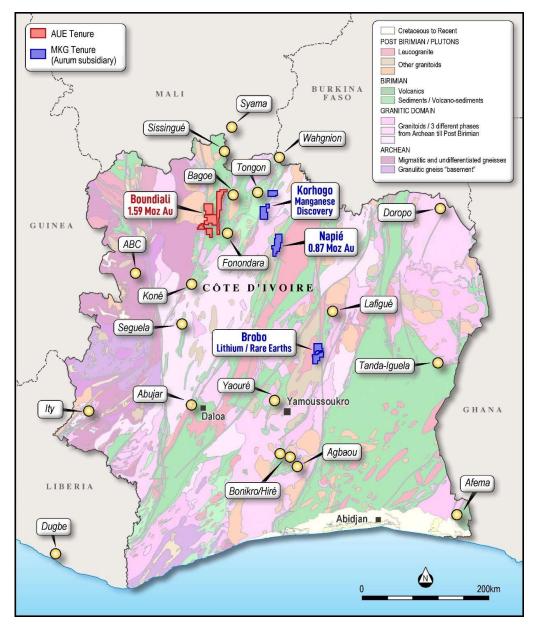


Figure 1: Location of Aurum's projects in Côte d'Ivoire



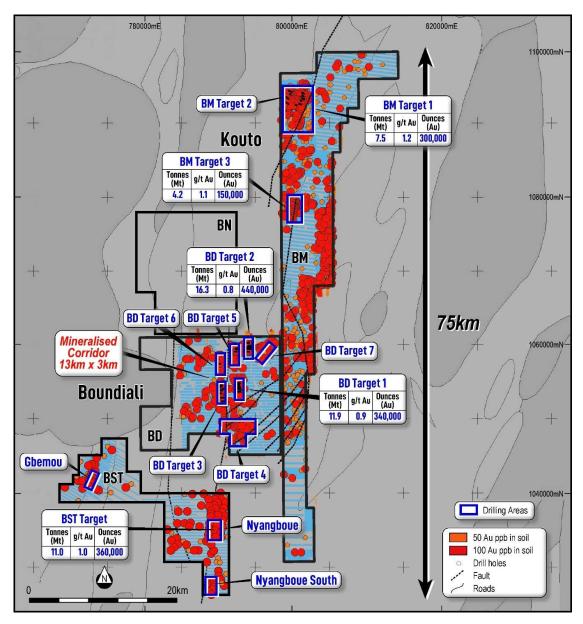


Figure 2: Aurum's Boundiali Gold Project



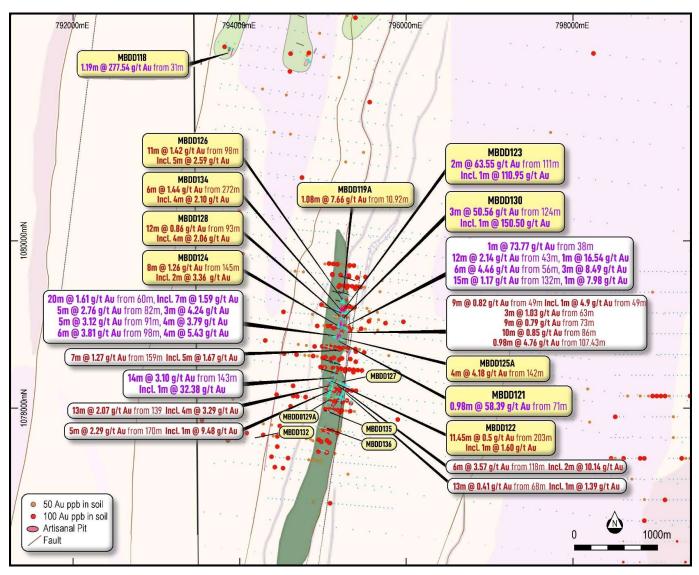


Figure 3: BM tenement plan view showing new significant drilling results (yellow) at BM Target 3



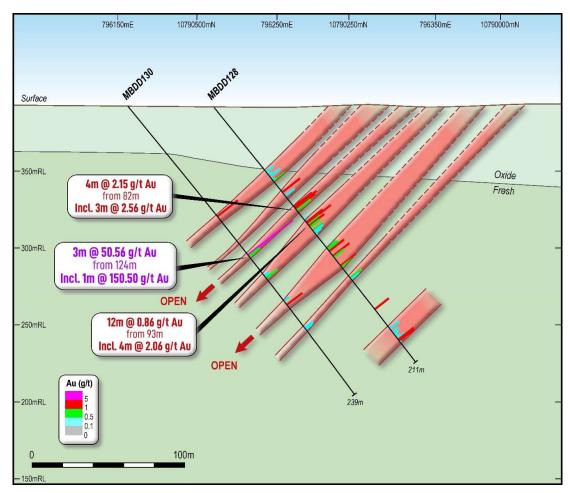


Figure 4: Oblique Cross Section looking northeast (+/-50m) showing new drill results MBDD130 – **BM** Target 3



Table 1: Drill Collar Information BM

Hole ID	UTM East	UTM North	Depth (m)	Dip deg	Azi deg	Prospect	Туре
MBDD117	796,656	1,093,500	458.50	-65	290	BM Target 1	DD
MBDD120	796,645	1,093,398	480.00	-65	290	BM Target 1	DD
2 Holes			938.50			BM Target 1	
Hole ID	UTM East	UTM North	Depth (m)	Dip deg	Azi deg	Prospect	Туре
MBDD119A	795,256	1,079,331	178.00	-50	105	BM Target 3	DD
MBDD121	795,164	1,078,805	177.00	-50	105	BM Target 3	DD
MBDD122	794,988	1,078,325	310.50	-50	105	BM Target 3	DD
MBDD123	795,166	1,079,141	260.30	-50	105	BM Target 3	DD
MBDD124	795,152	1,078,952	290.00	-50	105	BM Target 3	DD
MBDD125A	795,108	1,078,824	287.50	-50	105	BM Target 3	DD
MBDD126	795,241	1,079,238	264.70	-50	105	BM Target 3	DD
MBDD127	795,044	1,078,209	186.00	-50	105	BM Target 3	DD
MBDD128	795,210	1,079,044	211.00	-50	105	BM Target 3	DD
MBDD129A	794,987	1,078,220	272.50	-50	105	BM Target 3	DD
MBDD130	795,156	1,079,061	239.00	-50	105	BM Target 3	DD
MBDD132	795,003	1,078,046	207.00	-50	105	BM Target 3	DD
MBDD134	795,098	1,079,153	336.00	-50	105	BM Target 3	DD
MBDD135	795,000	1,077,937	190.50	-50	105	BM Target 3	DD
MBDD136	794,940	1,077,738	201.50	-50	105	BM Target 3	DD
15 Holes			3,611.50			BM Target 3	DD
All			Depth (m)			Total BM	
17 holes			4,550.00			BM Target 1 & 3	DD



Table 2: Significant assay results for holes being reported for BM<sup>10</sup>

Hole ID	From	То	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
	397.00	398.00	1.00	5.28			1.00m @ 5.28 g/t Au
	398.00	399.00	1.00	0.48			
	399.00	400.00	1.00	0.13	500 0440 // 4	7.4	
	400.00	401.00	1.00	0.18	6.00m @ 1.19 g/t Au	7.1	
	401.00	402.00	1.00	0.26			
	402.00	403.00	1.00	0.81			
	403.00	404.00	1.00	0.10			
	404.00	405.00	1.00	0.48			
	405.00	406.00	1.00	0.24			
	406.00	407.00	1.00	0.25			
	407.00	408.00	1.00	0.54			
	408.00	409.00	1.00	0.07			
	409.00	410.00	1.00	0.15	11.00m @ 0.55 g/t Au	6.1	
MDDD117	410.00	411.00	1.00	0.04			
MBDD117	411.00	412.00	1.00	0.37			
	412.00	413.00	1.00	0.85			
	413.00	414.00	1.00	2.46			1.00m @ 2.46 g/t Au
	414.00	415.00	1.00	0.65			-
	418.00	419.00	1.00	0.12			
	419.00	420.08	1.08	0.06			
	420.08	421.00	0.92	0.23			
	421.00	422.00	1.00	0.16	2.92m @ 0.20 g/t Au	0.6	
	422.00	423.00	1.00	0.22			
	423.00	424.00	1.00	0.11			
	424.00	425.00	1.00	0.14			
	425.00	426.00	1.00	0.09			
	426.00	427.00	1.00	0.13			
	450.00	451.00	1.00	0.25	1.00m @ 0.25 g/t Au	0.3	
	3.83	4.75	0.92	0.17			
	8.00	9.44	1.44	1.87	1.44m @ 1.86 g/t Au	2.7	1.44m @ 1.86 g/t Au
	10.92	12.00	1.08	7.66	1.08m @ 7.66 g/t Au	8.3	1.08m @ 7.66 g/t Au
	32.00	33.00	1.00	1.16	2.00m @ 0.70 g/t Au	1.4	1.00m @ 1.16 g/t Au
MBDD119A	33.00	34.00	1.00	0.25	2.00111 @ 0.70 g/t Au	1.4	
INIDUDITION	34.00	35.00	1.00	0.20			
	51.44	52.00	0.56	0.99	0.56m @ 0.99 g/t Au	0.6	
	98.00	99.08	1.08	0.11			
	99.08	100.00	0.92	2.38	6.92m @ 0.85 g/t Au	5.9	2.92m @ 1.69 g/t Au
	100.00	101.00	1.00	0.22	0.32111 @ 0.03 g/t Au	5.5	2.32111 @ 1.03 g/t Au

 $<sup>^{\</sup>rm 10}$  0.2 g/t Au cut off used with 3m internal dilution and no top cut applied



Hole ID	From	То	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
	101.00	102.00	1.00	2.52			
	102.00	103.00	1.00	0.62			
	103.00	104.00	1.00	0.09			
	104.00	105.00	1.00	0.02			
	105.00	106.00	1.00	0.23			
	115.00	116.00	1.00	0.19			
	42.86	43.68	0.82	0.23	0.82m @ 0.23 g/t Au	0.2	
	254.00	255.00	1.00	0.13			]
	294.00	295.00	1.00	0.17			
	307.00	308.00	1.00	0.50	2.00m @ 0.42 a/t Au	0.8	
	308.00	309.00	1.00	0.34	2.00m @ 0.42 g/t Au	0.8	
	377.00	378.00	1.00	0.18			
	381.00	382.00	1.00	1.99			1.00m @ 1.99 g/t Au
	382.00	383.00	1.00	0.48	3.00m @ 0.91 g/t Au	2.7	
	383.00	384.00	1.00	0.25			
	384.00	385.00	1.00	0.04			
	385.00	386.00	1.00	0.06			
l	386.00	387.00	1.00	0.57			
MBDD120	387.00	388.00	1.00	1.40	9.00m @ 1.33 g/t Au		
INIPODIZO	388.00	389.00	1.00	0.19			
	389.00	390.00	1.00	0.07			C 00 @ 1 C0 - /- A
	390.00	391.00	1.00	1.60		11.9	6.00m @ 1.69 g/t Au
	391.00	392.00	1.00	3.81			
	392.00	393.00	1.00	3.09			
	393.00	394.00	1.00	0.67			
	394.00	395.00	1.00	0.57			
	399.00	400.00	1.00	0.11			]
	401.00	402.00	1.00	0.19			
	402.00	403.00	1.00	0.11			
	408.65	410.00	1.35	0.13			
	413.00	414.00	1.00	0.14			
	477.00	478.00	1.00	0.14			
	6.86	8.35	1.49	0.15			
	17.00	18.00	1.00	0.27	1.00m @ 0.27 g/t Au	0.3	
	65.00	66.00	1.00	9.28	1.00m @ 9.28 g/t Au	9.3	1.00m @ 9.28 g/t Au
	68.00	69.00	1.00	0.12			
MBDD121	71.00	71.98	0.98	58.39	0.98m @ 58.39 g/t Au	57.2	0.98m @ 58.39 g/t Au
INIDDDITT	80.00	81.00	1.00	1.41	1.00m @ 1.41 g/t Au	1.4	1.00m @ 1.41 g/t Au
	101.00	102.00	1.00	0.50			
	102.00	103.00	1.00	0.01	6.00m @ 0.31 g/t Au	1 2	
	103.00	104.00	1.00	0.66	0.00111 @ 0.31 g/t Au	1.8	
	104.00	105.00	1.00	0.01			



Hole ID	From	То	Interval	Au	Sig Int > 0.2 g/t Au	m*g/t Au	Sig Int >1 g/t Au
				(ppm)		(gpm)	
	105.00	106.00	1.00	0.01			
	106.00	107.00	1.00	0.66			
	118.26	119.00	0.74	0.17			
	133.00	134.00	1.00	0.18			
	134.00	135.00	1.00	0.17			
	137.00	138.00	1.00	0.14			
	138.00	139.00	1.00	0.41	1.00m @ 0.41 g/t Au	0.4	
	154.00	155.00	1.00	0.70	1.00m @ 0.70 g/t Au	0.7	
	178.00	179.00	1.00	0.19			
	179.00	180.00	1.00	4.07	1.00m @ 4.07 g/t Au	4.1	1.00m @ 4.07 g/t Au
	180.00	181.00	1.00	0.10			
	187.00	188.00	1.00	0.16			
	191.00	192.00	1.00	0.85	1.00m @ 0.85 g/t Au	0.9	
	192.00	193.00	1.00	0.14			
	200.00	201.00	1.00	0.23	1.00m @ 0.23 g/t Au	0.2	
	201.00	202.00	1.00	0.11			
	202.00	203.00	1.00	0.05			
	203.00	204.00	1.00	0.26			
	204.00	205.00	1.00	0.51			
	205.00	206.00	1.00	0.24			
	206.00	207.00	1.00	0.20			
	207.00	208.00	1.00	0.06			
	208.00	209.00	1.00	0.20	11.45m @ 0.50 g/t Au	5.7	
	209.00	210.00	1.00	0.76			
MDDD433	210.00	211.00	1.00	1.60			1.00m @ 1.60 g/t Au
MBDD122	211.00	212.00	1.00	0.78			
	212.00	213.00	1.00	0.46			
	213.00	214.45	1.45	0.42			
	214.45	215.00	0.55	0.02			
	215.00	216.00	1.00	0.01			
	216.00	217.00	1.00	0.01			
	217.00	218.00	1.00	0.29	2.00	0.0	
	218.00	219.00	1.00	0.63	2.00m @ 0.46 g/t Au	0.9	
	232.00	233.00	1.00	0.88			
	233.00	234.00	1.00	1.97			1.00m @ 1.97 g/t Au
	234.00	235.00	1.00	0.26	5.00m @ 0.68 g/t Au	3.4	
	235.00	236.00	1.00	0.10	_		
	236.00	237.00	1.00	0.21			
	241.00	242.00	1.00	0.32	1.00m @ 0.32 g/t Au	0.3	
	275.00	276.00	1.00	0.14	<u> </u>		
	276.00	277.00	1.00	0.09			
	277.00	278.00	1.00	0.62	2.00m @ 0.53 g/t Au	1.1	



Hole ID	From	То	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
	278.00	279.00	1.00	0.45			
	279.00	280.00	1.00	0.09			
	280.00	281.00	1.00	0.14			
	288.00	289.00	1.00	4.98	1.00m @ 4.98 g/t Au	5.0	1.00m @ 4.98 g/t Au
	80.00	81.00	1.00	0.28	1.00m @ 0.28 g/t Au	0.3	
	101.00	102.00	1.00	0.16			
	102.00	103.00	1.00	0.18			
	103.00	104.00	1.00	0.23	2.00m @ 0.56 g/t Au	1.1	
	104.00	105.00	1.00	0.88	2.00111 @ 0.30 g/t Au	1.1	
	105.00	106.00	1.00	0.20			
	106.00	107.00	1.00	0.20			
	107.00	108.00	1.00	0.06			
	108.00	109.00	1.00	0.13			
	109.00	110.00	1.00	0.19			
	110.00	111.00	1.00	0.01			
	111.00	112.00	1.00	110.95	2.00m @ 63.55 g/t Au	127.1	1.00 @ 110.95 g/t Au
	112.00	113.00	1.00	16.15	2.55.11 @ 55.55 g/ t Au	127.1	1.00 @ 110.55 g/ t Au
	118.00	119.00	1.00	0.21			
-	119.00	120.00	1.00	1.87			
	120.00	121.00	1.00	0.54			4.00m @ 1.48 g/t Au
	121.00	122.00	1.00	2.16			4.00111 @ 1.46 g/t Au
	122.00	123.00	1.00	1.36			
	123.00	124.00	1.00	0.04			
MBDD123	124.00	125.00	1.00	0.06			
	125.00	126.00	1.00	0.03			
	126.00	127.00	1.00	0.64			
	127.00	128.00	1.00	2.66			
	128.00	129.00	1.00	2.58			
	129.00	130.00	1.00	1.90	23.00m @ 2.04 g/t Au	46.8	
	130.00	131.00	1.00	1.83			
	131.00	132.00	1.00	5.33			
	132.00	133.00	1.00	1.49			
	133.00	134.00	1.00	0.38			
	134.00	135.00	1.00	5.49			14.00m @ 2.85 g/t Au
	135.00	136.00	1.00	4.84			
	136.00	137.00	1.00	2.70			
	137.00	138.00	1.00	2.98			
	138.00	139.00	1.00	3.53			
	139.00	140.00	1.00	3.11			
	140.00	141.00	1.00	1.10			
	150.00	151.00	1.00	0.25	1.00m @ 0.25 g/t Au	0.2	
	158.00	159.00	1.00	0.20			



Hole ID	From	То	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
	159.00	160.00	1.00	0.01			
	160.00	161.00	1.00	0.08			
	161.00	162.00	1.00	0.34			
	162.00	163.00	1.00	1.02			
	163.00	164.00	1.00	1.13	C 00 @ 1 10/+ A	7.1	
	164.00	165.00	1.00	1.07	6.00m @ 1.19 g/t Au	/.1	5.00m @ 1.36 g/t Au
	165.00	166.00	1.00	1.90			
	166.00	167.00	1.00	1.69			
	167.00	168.00	1.00	0.13			
	172.00	173.00	1.00	4.18			
	173.00	174.00	1.00	0.68	4 00 @ 2 40 -/- 4	10.0	3.00m @ 3.13 g/t Au
	174.00	175.00	1.00	4.53	4.00m @ 2.49 g/t Au	10.0	
	175.00	176.00	1.00	0.59			
	185.00	186.00	1.00	0.34	1.00m @ 0.34 g/t Au	0.3	
	202.00	203.00	1.00	0.11			
	228.00	229.00	1.00	0.25			
	229.00	230.00	1.00	0.23	2.00m @ 0.24 g/t Au	0.5	
	3.00	4.00	1.00	0.32	1.00m @ 0.32 g/t Au	0.3	
	76.00	77.00	1.00	0.29	1.00m @ 0.29 g/t Au	0.3	
	90.00	91.00	1.00	0.10			
	91.00	92.00	1.00	0.10			
	95.00	96.00	1.00	0.34	1.00m @ 0.34 g/t Au	0.3	
	96.00	97.00	1.00	0.01			
	97.00	98.00	1.00	0.18			
	104.00	105.00	1.00	0.25			
	105.00	106.00	1.00	0.01	4.00 0.000 // 4		
	106.00	107.00	1.00	0.05	4.00m @ 0.22 g/t Au	0.9	
	107.00	108.00	1.00	0.56			
	116.00	117.00	1.00	0.35	1.00m @ 0.35 g/t Au	0.3	
MBDD124	145.00	146.00	1.00	0.64	-		
	146.00	147.00	1.00	5.13			
	147.00	148.00	1.00	1.58			2.00m @ 3.36 g/t Au
	148.00	149.00	1.00	0.03			
	149.00	150.00	1.00	0.15	8.00m @ 1.26 g/t Au	10.1	
	150.00	151.00	1.00	0.12			
	151.00	152.00	1.00	2.01			1.00m @ 2.01 g/t Au
	152.00	153.00	1.00	0.43			
	157.00	158.00	1.00	0.56			
	158.00	159.00	1.00	0.43			
	159.00	160.00	1.00	0.04	5.00m @ 0.35 g/t Au	1.7	
	160.00	161.00	1.00	0.39	2.2.2.6/11.00	,	
1	161.00	162.00	1.00	0.32			



Hole ID	From	То	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
	194.00	195.00	1.00	4.61	2.00 . 0.2.42 // 4		1.00m @ 4.61 g/t Au
	195.00	196.00	1.00	0.24	2.00m @ 2.42 g/t Au	4.8	
	202.00	203.00	1.00	0.18			
	203.00	204.00	1.00	0.32			
	204.00	205.00	1.00	0.19			
	205.00	206.00	1.00	0.10	C 00 @ 0 40 - /- A	2.4	
	206.00	207.00	1.00	0.06	6.00m @ 0.40 g/t Au	2.4	
	207.00	208.00	1.00	1.39			1.00m @ 1.39 g/t Au
	208.00	209.00	1.00	0.38			
	0.68	1.50	0.82	0.10			
	75.00	76.00	1.00	0.40			
	76.00	77.00	1.00	0.46			
	77.00	78.00	1.00	0.18	5.00m @ 0.27 g/t Au	1.4	
	78.00	79.00	1.00	0.02			
	79.00	80.00	1.00	0.30			
	83.00	84.00	1.00	0.13			
	84.00	85.00	1.00	0.22	1.00m @ 0.22 g/t Au	0.2	
	85.00	86.00	1.00	0.01			
	86.00	87.00	1.00	0.57			
	87.00	88.00	1.00	0.38			
	88.00	89.00	1.00	0.09		1.2	
	89.00	90.00	1.00	0.05	6.00m @ 0.22 g/t Au	1.3	
	90.00	91.00	1.00	0.01			
	91.00	92.00	1.00	0.21			
	107.00	108.00	1.00	0.19			
MBDD125A	124.00	125.00	1.00	0.54	1.00m @ 0.54 g/t Au	0.5	
	141.00	142.00	1.00	0.10			
	142.00	143.00	1.00	3.02			
	143.00	144.00	1.00	4.29	4.00 0.440 // 4	46.7	4.00 0.440 // 4
	144.00	145.00	1.00	5.23	4.00m @ 4.18 g/t Au	16.7	4.00m @ 4.18 g/t Au
	145.00	146.00	1.00	4.16			
	146.00	147.00	1.00	0.11			
	175.00	176.00	1.00	1.55	2.00 0.4.00 // A	2.2	1.00m @ 1.55 g/t Au
	176.00	177.00	1.00	0.64	2.00m @ 1.09 g/t Au	2.2	
	177.00	178.00	1.00	0.16			
	178.00	179.00	1.00	0.03			
	179.00	180.00	1.00	0.13			
	182.00	183.00	1.00	0.42	1.00m @ 0.42 g/t Au	0.4	
	189.00	190.00	1.00	3.28			1.00m @ 3.28 g/t Au
	190.00	191.00	1.00	0.09	E 00m @ 0 02 ~/+ 4	4.1	
	191.00	192.00	1.00	0.44	5.00m @ 0.83 g/t Au		
	192.00	193.00	1.00	0.01			



Hole ID	From	То	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
	193.00	194.00	1.00	0.34			
	199.00	200.00	1.00	1.06	1.00m @ 1.06 g/t Au	1.1	1.00m @ 1.06 g/t Au
	267.00	268.00	1.00	0.27	1.00m @ 0.27 g/t Au	0.3	
	0.00	1.00	1.00	0.14			
	1.00	2.22	1.22	0.56	1.22m @ 0.56 g/t Au	0.7	
	8.00	8.53	0.53	0.14			
	15.00	16.00	1.00	0.62	1.00m @ 0.61 g/t Au	0.6	
	35.00	36.00	1.00	0.16			
	36.00	37.00	1.00	0.18			
	37.00	38.00	1.00	0.37	1.00m @ 0.36 g/t Au	0.4	
	38.00	39.00	1.00	0.11			
	45.00	46.00	1.00	0.44			
	46.00	47.00	1.00	0.34			
	47.00	48.00	1.00	0.01	6.00m @ 0.30 g/t Au	1.8	
	48.00	49.00	1.00	0.01	0.00 6 0.00 8, 07.00	1.0	
	49.00	50.00	1.00	0.31			
	50.00	51.00	1.00	0.70			
	55.00	56.00	1.00	0.41			
	56.00	57.00	1.00	0.25			
	57.00	58.00	1.00	1.05			2.00m @ 1.11 g/t Au
	58.00	59.00	1.00	1.18			2.00m @ 1.11 g/t Au
	59.00	60.00	1.00	0.18	9.00m @ 0.46 g/t Au	4.1	
MBDD126	60.00	61.00	1.00	0.29			
	61.00	62.00	1.00	0.02			
	62.00	63.00	1.00	0.34			
	63.00	64.00	1.00	0.42			
	68.00	69.00	1.00	0.74			
	69.00	70.00	1.00	0.07			
	70.00	71.00	1.00	0.02			
	71.00	72.00	1.00	0.32	7.00m @ 0.34 g/t Au	2.4	
	72.00	73.00	1.00	0.15			
	73.00	74.00	1.00	0.55			
	74.00	75.00	1.00	0.51			
	76.00	77.00	1.00	0.16			
	78.00	79.00	1.00	0.11			
	80.00	81.00	1.00	0.14			
	83.00	84.00	1.00	1.95			
	84.00	85.00	1.00	0.01			
	85.00	86.00	1.00	2.74	8.00m @ 1.00 g/t Au	8.0	5.00m @ 1.40 g/t Au
	86.00	87.00	1.00	0.57	5.00m @ 1.00 g/t Au	0.0	
	87.00	88.00	1.00	1.70			
	88.00	89.00	1.00	0.06			



Hole ID	From	То	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
	89.00	90.00	1.00	0.17			
	90.00	91.00	1.00	0.82			
	91.00	92.00	1.00	0.11			
	95.00	96.00	1.00	0.43	1.00m @ 0.43 g/t Au	0.4	
	96.00	97.00	1.00	0.01			
	97.00	98.00	1.00	0.01			
	98.00	99.00	1.00	1.84			
	99.00	100.00	1.00	0.04			
	100.00	101.00	1.00	0.34			5.00m @ 2.59 g/t Au
	101.00	102.00	1.00	2.46			
	102.00	103.00	1.00	8.26			
	103.00	104.00	1.00	0.35	11.00m @ 1.42 g/t Au	15.6	
	104.00	105.00	1.00	0.96			
	105.00	106.00	1.00	0.12			
	106.00	107.30	1.30	0.39			
	107.30	108.00	0.70	0.36			
	108.00	109.00	1.00	0.52			
	109.00	110.00	1.00	0.20			
	110.00	110.55	0.55	0.18			
	110.55	112.00	1.45	0.11			
	112.00	113.00	1.00	0.02			
	113.00	114.00	1.00	0.21	2.00 @ 4.00 - /- 4	2.0	
	114.00	115.00	1.00	3.56	2.00m @ 1.88 g/t Au	3.8	1.00m @ 3.56 g/t Au
	118.00	119.00	1.00	0.10			
	119.00	120.00	1.00	0.57			
	120.00	121.00	1.00	0.18	3.00m @ 0.43 g/t Au	1.3	
	121.00	122.00	1.00	0.55			
	122.00	123.00	1.00	0.18			
	123.00	124.00	1.00	0.20			
	126.00	127.00	1.00	0.10			
	127.00	128.00	1.00	0.13			
	129.00	130.00	1.00	0.12			
	142.00	143.00	1.00	0.88	1.00m @ 0.88 g/t Au	0.9	
	148.00	149.00	1.00	0.38	1.00m @ 0.38 g/t Au	0.4	
	112.00	113.00	1.00	0.58			
	113.00	114.00	1.00	0.03	4.00m @ 0.22 g/t Au	0.9	
	114.00	115.00	1.00	0.02	4.00111 @ 0.22 g/t AU	0.9	
MDDD137	115.00	116.00	1.00	0.27			
MBDD127	119.00	120.00	1.00	1.54			1.00m @ 1.54 g/t Au
	120.00	121.00	1.00	0.07	3.00m @ 0.73 g/t Au	2.2	
	121.00	122.00	1.00	0.58			
	127.00	128.00	1.00	0.78	2.00m @ 0.71 g/t Au	1.4	



Hole ID	From	То	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
	128.00	129.00	1.00	0.64		,	
	129.00	130.00	1.00	0.11			
	130.00	131.00	1.00	0.18			
	133.00	134.00	1.00	0.13			
	144.00	145.00	1.00	0.13			
	149.00	150.00	1.00	0.16			
	155.00	156.00	1.00	0.15			
	181.00	182.00	1.00	0.18			
	0.00	0.95	0.95	0.19			
	53.00	54.00	1.00	0.32			
	54.00	55.00	1.00	0.13			
	55.00	56.00	1.00	0.05	5.00m @ 0.23 g/t Au	1.2	
	56.00	57.00	1.00	0.18			
	57.00	58.00	1.00	0.48			
	59.00	60.00	1.00	0.11			
	60.00	61.00	1.00	0.14			
	61.00	62.00	1.00	0.64	1.00m @ 0.64 g/t Au	0.6	
	69.00	70.00	1.00	0.14			
	70.00	71.00	1.00	1.74			1.00m @ 1.74 g/t Au
	71.00	72.00	1.00	0.02	4.00	2.2	
	72.00	73.00	1.00	0.03	4.00m @ 0.55 g/t Au	2.2	
	73.00	74.00	1.00	0.43			
	82.00	83.00	1.00	1.87			
	83.00	84.00	1.00	3.49			3.00m @ 2.56 g/t Au
	84.00	85.00	1.00	2.32	4.00m @ 2.15 g/t Au	8.6	
MBDD128	85.00	86.00	1.00	0.94			
	93.00	94.00	1.00	0.20			
	94.00	95.00	1.00	0.04			
	95.00	96.00	1.00	1.46			
	96.00	97.00	1.00	4.85			
	97.00	98.00	1.00	0.76			4.00m @ 2.06 g/t Au
	98.00	99.00	1.00	1.20			
	99.00	100.00	1.00	0.50	12.00m @ 0.86 g/t Au	10.3	
	100.00	101.00	1.00	0.03			
	101.00	102.00	1.00	0.01			
	102.00	103.00	1.00	0.54			
	103.00	104.00	1.00	0.42			
	104.00	105.00	1.00	0.27			
	105.00	106.00	1.00	0.13			
	111.00	112.00	1.00	0.11			
	116.00	117.00	1.00	0.47			
	117.00	118.00	1.00	0.52	9.00m @ 0.54 g/t Au	4.8	



Hole ID	From	То	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
	118.00	119.00	1.00	0.61			
	119.00	120.00	1.00	1.14			1.00m @ 1.14 g/t Au
	120.00	121.00	1.00	0.04			
	121.00	122.00	1.00	0.01			
	122.00	123.00	1.00	0.05			
	123.00	124.00	1.00	1.48			1.00m @ 1.48 g/t Au
	124.00	125.00	1.00	0.52			
	131.00	132.00	1.00	1.24	202 0004 // 4	4.0	1.00m @ 1.24 g/t Au
	132.00	133.00	1.00	0.64	2.00m @ 0.94 g/t Au	1.9	
	141.00	142.00	1.00	0.63	202 0054 // 4	1.0	
	142.00	143.00	1.00	0.38	2.00m @ 0.51 g/t Au	1.0	
	167.00	168.00	1.00	1.05	1.00m @ 1.05 g/t Au	1.1	1.00m @ 1.05 g/t Au
	182.00	183.00	1.00	0.13			
	183.00	184.00	1.00	0.46	1.00m @ 0.46 g/t Au	0.5	
	184.00	185.00	1.00	0.03			
	185.00	186.00	1.00	0.07			
	186.00	187.00	1.00	0.27			]
	187.00	188.00	1.00	0.20			
	188.00	189.00	1.00	0.01			
	189.00	190.00	1.00	0.16	0.00	2.5	
	190.00	191.00	1.00	0.04	8.00m @ 0.44 g/t Au	3.5	
	191.00	192.00	1.00	0.32			
	192.00	193.00	1.00	1.28			2.00 0.4.25 // 4
	193.00	194.00	1.00	1.24			2.00m @ 1.26 g/t Au
	194.00	195.00	1.00	0.12			
	155.00	156.00	1.00	3.39	1.00m @ 3.39 g/t Au	3.4	1.00m @ 3.39 g/t Au
	167.00	168.00	1.00	0.18			
	171.00	172.00	1.00	0.15			
	172.00	173.00	1.00	0.05			
MBDD129A	173.00	174.00	1.00	0.22	1.00m @ 0.22 g/t Au	0.2	
	174.00	175.00	1.00	0.13			
	191.00	192.00	1.00	0.12			
	216.00	217.00	1.00	0.60	1.00m @ 0.60 g/t Au	0.6	
	241.00	242.00	1.00	0.26	1.00m @ 0.26 g/t Au	0.3	
	92.00	93.00	1.00	2.89	1.00m @ 2.89 g/t Au	2.9	1.00m @ 2.89 g/t Au
	114.00	115.00	1.00	0.10			
	124.00	125.00	1.00	150.50			1.00m @ 150.50 g/t Au
MBDD130	125.00	126.00	1.00	0.58	3.00m @ 50.56 g/t Au	151.7	
555130	126.00	127.00	1.00	0.61			
	141.00	142.00	1.00	0.22			
	142.00	143.00	1.00	0.20	3.00m @ 0.35 g/t Au	1.0	
	143.00	144.00	1.00	0.62			



Hole ID	From	То	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
	162.00	163.00	1.00	0.25			
	163.00	164.00	1.00	0.01	4.00 0.0 40 // 4	1.6	
	164.00	165.00	1.00	0.01	4.00m @ 0.40 g/t Au	1.6	
	165.00	166.00	1.00	1.33			1.00m @ 1.33 g/t Au
	184.00	185.00	1.00	0.41	2.00 0.020 // A	0.0	
	185.00	186.00	1.00	0.34	2.00m @ 0.38 g/t Au	0.8	
	90.00	91.00	1.00	0.10			
	94.00	95.00	1.00	0.66	1.00m @ 0.66 g/t Au	0.7	
	97.86	99.00	1.14	0.13			
	104.00	105.00	1.00	0.11			
	105.00	106.00	1.00	0.70			
	106.00	107.00	1.00	0.19			
MDDD133	107.00	108.00	1.00	0.08	6.00m @ 0.46 g/t Au	2.8	
MBDD132	108.00	109.00	1.00	0.28	0.00111 @ 0.40 g/t Au	2.0	
	109.00	110.00	1.00	0.25			
	110.00	111.00	1.00	1.28			1.00m @ 1.28 g/t Au
	111.00	112.00	1.00	0.14			
	118.00	119.00	1.00	0.49	1.00m @ 0.49 g/t Au	0.5	
	119.69	121.00	1.31	0.13			
	123.00	124.00	1.00	0.44	1.00m @ 0.44 g/t Au	0.4	
	81.00	82.00	1.00	0.10			
	155.00	156.00	1.00	0.13			
	163.00	164.00	1.00	0.21	1.00m @ 0.21 g/t Au	0.2	
	217.00	218.00	1.00	0.14			
	220.00	221.00	1.00	0.22	1.00m @ 0.22 g/t Au	0.2	
	227.00	228.00	1.00	0.33			
	228.00	229.00	1.00	0.01	3.00m @ 0.98 g/t Au	2.9	
	229.00	230.00	1.00	2.60			1.00m @ 2.60 g/t Au
	272.00	273.00	1.00	5.07			
MBDD134	273.00	274.00	1.00	1.36			4.00m @ 2.10 g/t Au
MBDD134	274.00	275.00	1.00	0.30	6.00m @ 1.44 g/t Au	8.6	4.00m @ 2.10 g/ t Au
	275.00	276.00	1.00	1.67	0.00m @ 1.44 g/t Au	8.0	
	276.00	277.00	1.00	0.01			
	277.00	278.00	1.00	0.22			
	282.00	283.00	1.00	1.52			1.00m @ 1.52 g/t Au
	283.00	284.00	1.00	0.01	3.00m @ 0.58 g/t Au	1.7	
	284.00	285.00	1.00	0.21			
	285.00	286.00	1.00	0.16			
	292.00	293.00	1.00	0.81	1.00m @ 0.81 g/t Au	0.8	
	304.00	305.00	1.00	0.20	1.00m @ 0.20 g/t Au	0.2	
MBDD135	131.00	132.00	1.00	0.43	1.00m @ 0.43 g/t Au	0.4	
MBDD136	143.00	144.00	1.00	0.14			



	Hole ID	From	То	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
Ī		170.00	171.00	1.00	0.10			
		171.00	172.00	1.00	0.12			
		172.00	173.00	1.00	1.36	1.00m @ 1.36 g/t Au	1.4	1.00m @ 1.36 g/t Au



## **About Aurum**

Aurum Resources (ASX:AUE) is an Australian based gold exploration company focused on discovery and development of major gold projects in Côte d'Ivoire, West Africa. Aurum has 2.47Moz gold resources coming from two gold projects, the 1.6Moz Boundiali Gold Project and the 0.87Moz Napié Gold Project. Aurum owns and runs eight (8) diamond drill rigs allowing it to explore faster and more cost effectively than its peers.

Statement of Boundiali Mineral Resources by Deposit as at 29 December 2024. Reported at 0.5 g/t Au cut off within pit shells; and 1.0 g/t Au cut off below the pit shells<sup>11</sup>

			Oxide			Transition			Fresh			Total	
Area	Class	Quantity	A (m/t)	Au Au	Quantity	A (= #)	Au	Quantity	uantity A. ( ( )	Au	Quantity	Au	Au
		(Mt)	Au (g/t)	(Oz)	(Mt)	Au (g/t)	(KOz)	(Mt)	Au (g/t)	(KOz)	(Mt)	(g/t)	(KOz)
	Indicated	0.8	1.1	30,000	0.7	1.2	30,000	2.4	1.0	80,000	3.9	1.1	130,000
BST	Inferred	0.6	1.0	20,000	1.3	1.0	40,000	5.1	1.0	160,000	7.1	1.0	220,000
	Sub Total	1.4	1.1	50,000	2.0	1.0	70,000	7.6	1.0	240,000	11.0	1.0	360,000
	Indicated												
BDT1	Inferred	0.8	0.9	20,000	0.3	0.9	10,000	10.8	0.9	310,000	11.9	0.9	340,000
	Sub Total	0.8	0.9	20,000	0.3	0.9	10,000	10.8	0.9	310,000	11.9	0.9	340,000
	Indicated												
BDT2	Inferred	0.1	0.8	3,000	2.1	0.8	60,000	14.1	0.8	380,000	16.3	0.8	440,000
	Sub Total	0.1	0.8	3,000	2.1	0.8	60,000	14.1	0.8	380,000	16.3	0.8	440,000
	Indicated												
BMT1	Inferred	0.3	1.0	10,000	0.1	1.0	3,000	7.1	1.3	288,000	7.5	1.2	300,000
	Sub Total	0.3	1.0	10,000	0.1	1.0	3,000	7.1	1.3	288,000	7.5	1.2	300,000
	Indicated												
BMT3	Inferred	0.2	1.1	10,000	0.3	1.1	10,000	3.8	1.1	130,000	4.2	1.1	150,000
	Sub Total	0.2	1.1	10,000	0.3	1.1	10,000	3.8	1.1	130,000	4.2	1.1	150,000
	Indicated	0.8	1.2	30,000	0.7	1.3	30,000	2.4	1.0	80,000	3.9	1.0	130,000
All	Inferred	2.0	1.0	60,000	4.1	0.9	120,000	40.8	1.0	1,270,000	47.0	1.0	1,450,000
	Total	2.8	1.0	90,000	4.8	1.0	150,000	43.3	1.0	1,350,000	50.9	1.0	1,590,000

**Napié Mineral Resource Estimate**; On 14 June 2022, a maiden Mineral Resource Estimate was reported in accordance with JORC (2012) comprising two deposits, Tchaga and Gogbala.<sup>12</sup>

Deposit	Category	Tonnes (Mt)	Grade (g/t Au)	Au (koz)
Tchaga	Inferred	14.6	1.16	545
Gogbala	Inferred	7.8	1.29	323
Global Resource	Total	22.5	1.20	868

Resources reported at a cut-off grade of 0.6g/t gold. Differences may occur in totals due to rounding.

<sup>12</sup> "Mako Delivers 868koz Maiden Resource to Provide Strong Growth Platform at Napié" released to the Australian Securities Exchange on 14 June 2022 and available to view on www.asx.com.au.

<sup>&</sup>lt;sup>11</sup> "Aurum delivers 1.6Moz Maiden JORC Resource at Boundiali Gold Project" released to the Australian Securities Exchange on 30 December 2024 and amended on 31 December 2024 and available to view on www.asx.com.au.



# **Boundiali Gold Project (1.6Moz)**

The flagship 1.6Moz Boundiali Gold Project is comprised of four neighbouring exploration tenements and is located within the same greenstone belt as Resolute's large Syama (11.5Moz) gold mine and Perseus' Sissingue (1.4 Moz) gold mine to the north and Montage Gold's 4.5Moz Koné project located to the south. Barrick's Tongon mine (5.0Moz) is located to the northeast (Figure 1):

- 1) Boundiali Minex Tenement PR0893 ("**BM**"), 400km², holder Minex West Africa, of which Aurum holds 80% (through its fully owned subsidiary Plusor Global Pty Ltd "Plusor") and can hold interest of between 80-88% in a mining licence.
- 2) Boundiali DS tenement PR808 ("**BD**"), 260km², holder DS Resources Joint Venture Company, of which Aurum is 80% share capital owner through its fully owned subsidiary Plusor.
- 3) Boundiali South tenement PR414 ("BST"), 167.34km² is located directly south of Aurum's BD and BM tenement. The BST exploration tenement was renewed on 19<sup>th</sup> August 2024. Predictive Discovery Côte d'Ivoire SARL (89% owned by Turaco Gold Limited and 11% owned by Predictive Discovery Limited) agreed to sell 100% interest to Aurum, subject to Aurum obtaining a renewal of the Boundiali South tenement (or the granting of a replacement tenement) and being satisfied that the terms of the renewal (or replacement) do not restrict exploration or potential future mining rights, along with all required Government approvals.
- 4) Boundiali North tenement PR283 ("**BN**"), 208.87km2, under renewal, Aurum to earn up to 70% interest through its wholly owned subsidiary Plusor.

## BM gold project JV

Plusor has earnt 80% interest through drilling 8,000m and spending US\$2.5M accumulated exploration expenditure.

- Completed drilling 4,000m diamond holes to earn 30% interest
- Completed drilling a further 4,000m diamond holes to earn accumulated 51% interest
- Earnt an accumulated 80% interest from a total exploration expenditure of US\$2.5M using a nominal diamond drilling cost of US\$140/m in calculation for expenditure commitment.
- 80-88% interest in future gold production company (Government gets 10% free carry from local partner):
  - o 80% if local partner contributes 11% capex
  - o 85% if local partner does not contribute capex they go to 5% free carry
  - o 88% if local partner sells us 3% of their interest they go to 2% free carry

# **BD** gold project JV

Plusor owns 80% interest acquired from DS Joint Venture Company's two shareholders:

- acquired 45% share capital of DS Joint Venture Company Sarl by paying US\$430,000 to DS Resources Sarl; and
- acquired 35% share capital of DS Joint Venture Company Sarl from Turaco Gold Ltd by drilling 3,500m diamond holes in Turaco's other gold projects in Côte d'Ivoire. This commitment has been completed.
- 80-88% interest in future gold production company (Government gets 10% free carry from local partner):



- o 80% if local partner contributes 11% capex
- o 85% if local partner does not contribute capex they go to 5% free carry
- o 88% if local partner sells us 3% of their interest they go to 2% free carry

## BST gold project consideration and payment for the binding term sheet

- Purchase of the tenement is subject to Aurum obtaining a renewal of the BST tenement (or the granting of a replacement) and being satisfied that the terms of the renewal (or replacement permit) do not restrict exploration or potential future mining rights, along with required Government approvals
- Within 15 business days of the satisfaction (or waiver) of the conditions precedent above, the Seller will, by written notice to the Purchaser, elect to receive **one** of the following forms of consideration (**Election**):
  - (i) A\$800,000 in cash (Cash Consideration); or
  - (ii) If the 20-day volume weighted average trading price of Shares (VWAP) is:
    - Less than or equal to A\$0.20 at the time of the Election, 5,000,000 fully paid ordinary shares in the Purchaser (Shares) (Consideration Shares 1); or
    - Greater than A\$0.20 at the time of the Election, Shares to a value of A\$1.2 million, as determined by dividing A\$1.2 million by the 20-day VWAP for the Shares (Consideration Shares 2)
- 90% interest in future gold production company (Government get 10% free carry from our interest)

## BN gold project JV

Aurum is earning interest through carrying out exploration to earn 70% interest in three stages:

- Stage 1: Aurum earns 35% interest by spending USD 1.2 million within 36 months of license grant
- Stage 2: Aurum earns 51% interest by spending USD 2.5 million within 60 months of license grant
- Stage 3: Aurum earns 70% interest upon completion of a pre-feasibility study on the tenement.
- Diamond drilling conducted by Aurum will be valued at US\$140 per meter for expenditure calculations
- Upon grant of a mining exploitation license, the ownership structure will be: Aurum (70%), GNRR (20%), Ivorian Government (10%)

## Mako Gold projects

.

Mako Gold (majority owned subsidiary of Aurum) entered into a farm-in and joint venture agreement on the Napié Permit with Occidental Gold SARL, a subsidiary of West African gold miner Perseus Mining Limited (ASX/TSX:PRU) in 2017<sup>13</sup>. Subsequently Mako renegotiated the agreement with Perseus and

<sup>&</sup>lt;sup>13</sup> For details of the agreement please refer to Section 9.1 of Mako Gold's Prospectus and section 4.6 of Mako Gold's Supplementary Prospectus, lodged on the ASX on 13 April 2018, and ASX release dated 29 June 2021



has consolidated its ownership in the Napié Project from 51% to 90%<sup>14</sup>. In addition, Mako Gold has 100% ownership of the Korhogo Project (significant manganese discovery<sup>15</sup>) and the Brobo Project (lithium/rare earths).

 $<sup>^{14}</sup>$  Refer to ASX releases dated 29 June 2021 and 21 October 2022

<sup>&</sup>lt;sup>15</sup> Refer to ASX release dated 26 April 2023



# Section 1 of the JORC Code, 2012 Edition – Table 1

# **Sampling Techniques and Data**

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul> <li>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul> <li>Samples were collected using diamond drilling techniques generally angled at 50° towards north-northwest to optimally intersect the mineralised zones.</li> <li>Diamond core was logged both for geological and mineralised structures as noted above. The core was then cut in half using a diamond brick cutting saw on 1m intervals. Typically the core was sampled to geological intervals as defined by the geologist within the even two metre sample intervals utilised. The right-hand side of the core was always submitted for analysis with the left side being stored in trays on site.</li> <li>Sampling and QAQC procedures were carried out to industry standards.</li> <li>Sample preparation was completed by independent international accredited laboratory Intertek Minerals Ltd. Following cutting or splitting, the samples were bagged by the Client employees and then sent to the laboratory for preparation. These samples were subsequently sent to Ghana for analysis via 30g fire assay.</li> </ul>
Drilling techniques	<ul> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> <li>Method of recording and assessing core</li> </ul>	<ul> <li>Diamond drilling carried out with mostly NTW and some HQ sized equipment. PQ-size rods and casing were used at the top the holes to stabilise the collars although no samples were taken from the PQ size core.</li> <li>Diamond drilling core recoveries ranged between 95% and 100% for all holes.</li> </ul>
recovery	<ul> <li>and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	between 85% and 100% for all holes with no significant issues noted.
Logging	Whether core and chip samples have been geologically and geotechnically	All holes were field logged by company geologists. Lithological, alteration and



Criteria	JORC Code explanation	Commentary
Sub- sampling	logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.  • Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.  • The total length and percentage of the relevant intersections logged.	mineralogical nomenclature of the deposit as well as sulphide content were recorded. Metallurgical, Geotechnical and structural data has been recorded  • Photography and recovery measurements were carried out by assistants under a geologist's supervision.  • All drill holes were logged in full.  • Logging was qualitative and quantitative in nature.  • NTW core cut in half using a core saw. Typically, the core was sampled to
techniques and sample preparation	<ul> <li>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	major geological intervals as defined by the geologist within the even two metre sample intervals utilised. All samples were collected from the same side of the core.  • Sample sizes are considered appropriate to correctly represent the moderately nuggetty gold mineralisation based on: the style of mineralisation, the thickness and consistency of the intersections, the sampling methodology and assay value ranges for Au.  • The 250gm sample is milled through an LM5 using a single puck to 90% <75 micron  • Milled sample is homogenised through a matt roll with a 150gm routine sample collected using a spoon around the quadrants and sent to Ghana for analysis and the remaining 100gm kept at Intertek for checks.  • Field QC procedures involved the use of 2 types of certified reference materials (1 in 20) which is certified by Geostats Ltd,  • Primary DD duplicate: Generated by cutting the remaining half core into a ¼ and sampled.  • Coarse blank samples: Inserted 1 in every 20 samples  • Laboratory Internal Duplicates and Standards  • Sample sizes are considered appropriate to correctly represent the moderately nuggetty gold mineralisation, the thickness and consistency of the intersections, the sampling methodology and assay value



Criteria	JORC Code explanation	Commentary
		ranges for gold
Quality of assay data and laboratory tests	<ul> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</li> </ul>	<ul> <li>The analytical techniques used 50 gram Fire Assay on 150g pulp samples.</li> <li>No geophysical tools were used to determine any element concentrations used for this report.</li> <li>Sample preparation checks for fineness were carried out by the laboratory as part of internal procedures to ensure the grind size of 2mm was being attained. Laboratory QAQC includes the use of internal standards using certified reference material, and pulp replicates. No anomalous assays were noted in information provided to the Client.</li> <li>The QAQC results confirm that acceptable levels of accuracy and precision have been established for the Classifications applied.</li> </ul>
Verification of sampling and assaying	<ul> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>	<ul> <li>NA</li> <li>No holes have been twinned</li> <li>No adjustment to assay data</li> <li>Logging records were mostly registered in physical format and were input into a digital format. The core photographs, collar coordinates and down the hole surveys were received in digital format.</li> <li>Assay values that were below detection limit were adjusted to equal half of the detection limit value. Un-sampled intervals were assumed to have no mineralisation and they were therefore set to blank in the database, however these are minimal.</li> </ul>
Location of data points	<ul> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>	<ul> <li>DD collar positions were initially located using a handheld GPS with a location error of +/3m.</li> <li>The datum employed is WGS84, Zone 29</li> <li>All drill hole locations are then surveyed utilising the differential GPS methods by both company and third party surveyors.</li> <li>DGPS system utilised is typically within a 10 cm accuracy range which is suitable for the classification applied.</li> </ul>
Data spacing and distribution	<ul> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral</li> </ul>	<ul> <li>Drillholes were completed on variable spacings (100m by 50m) and orientations.</li> <li>The drill hole spacing and distribution is considered sufficient to establish the degree of continuity appropriate for the</li> </ul>



Criteria	JORC Code explanation	Commentary
Orientation of data in relation to geological structure	Resource and Ore Reserve estimation procedure(s) and classifications applied.  Whether sample compositing has been applied.  Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.  If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	Inferred Mineral Resource estimation procedures.  The samples were not composited prior to assay.  Drill holes were drilled approximately at right angles to the anticipated strike of the target geochemical anomaly and orthogonal to the interpreted mineralisation orientation.
Sample security	The measures taken to ensure sample security.	Chain of custody is managed by the Client's senior site geologists and geotechnicians. Samples are stored in a core shed at site and samples were delivered to the laboratory by client geologists. Client employees have no further involvement in the preparation or analysis of the samples.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	Detailed reviews of sampling techniques were carried out on the site visit by RPM in October 2024.

# Section 2 of the JORC Code, 2012 Edition – Table 1

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.</li> </ul>	<ul> <li>Exploration results are from the Boundiali project area</li> <li>PR893 (BM), 400km2, holder Minex West Africa, of which Aurum has earnt 80% interest and can earn up to 88% in a mining licence through its fully owned subsidiary Plusor Global Pty Ltd ("Plusor").</li> <li>There are no impediments to working in the area.</li> </ul>
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<ul> <li>The exploration results reported in this announcement are from work undertaken by PlusOr and BM on behalf of Aurum Resources Limited</li> <li>The license area is known as a prospective region for gold and recent artisanal workings revealed the presence of primary gold mineralisation in artisanal pits and small-scale underground mining.</li> </ul>
Geology	Deposit type, geological setting and	The Boundiali Deposits are located



Criteria	JORC Code explanation	Commentary
	style of mineralisation.	within the Proterozoic Birimian rocks of
	, , , , , , , , , , , , , , , , , , , ,	the Man shield. It is situated on,
		100km west of from the Korhogo in the
		northern part of the Côte d'Ivoire. They
		are located in the Bagoué- Syama
		shear zone within the sedimentary rock
		with minor associated intrusions of
		mafic dykes and late-stage granitoids.
		The various rock units trend NS to NNE
		similar to the regional metamorphic
		grade. The regional trend is NE to N.
		The Boundiali deposits resemble
		typical shear zone deposits of the West
		African granite-greenstone terrane.
		The deposits themselves are associated
		with a major regional shear zone and
		are developed in a sandstone.
		Mineralisation may be spatially related to the emplacement of intrusives. The
		gold mineralisation is mesothermal in
		origin and occurs as free gold in quartz
		vein stockworks and zones of
		silicification, associated with pyrite and
		chalcopyrite. The gold mineralisation is
		found in linear zones with the contacts
		showing evidence of shearing. Free
		gold is frequently observed. Alteration
		is weak to strong depending on the
		development of the system typically
		being sericite.
		Two types of deformation are present
		in the drill cores: ductile deformation
		and brittle deformation. The gold
		mineralisation is related to deformed
		sandstone and graywacke, in shear
		zones, with sulphides (mainly pyrite
		and minor chalcopyrite) associated
		with visible gold. Alteration is characterized by chlorite, sericite,
		calcite, secondary quartz and
		disseminated pyrite. This assemblage
		is well developed in schistose, foliated
		rocks with presence of quartz veins or
		veinlets.
Drill hole	A summary of all information material to	Complete drill hole data has been
information	the under-standing of the exploration	provided.
	results including a tabulation of the	Drill hole collar locations are shown in
	following information for all Material	figures in main body of announcement.
	drill holes:	
	<ul> <li>easting and northing of the drill hole</li> </ul>	
	collar	
	<ul> <li>elevation or RL (Reduced Level –</li> </ul>	



Criteria	JORC Code explanation	Commentary
	elevation above sea level in metres) of the drill hole collar  • dip and azimuth of the hole  • down hole length and interception depth  • hole length  • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	
Data aggregation methods	<ul> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<ul> <li>Assay Intervals are shown in detail.         Drilling intervals are predominantly         1m.     </li> <li>Metal equivalent values are not being         reported.</li> </ul>
Relationship between mineralisation widths and intercept lengths	<ul> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</li> </ul>	<ul> <li>True widths have not been estimated as the geological controls on mineralisation in these initial drill holes into the prospect are not yet well understood.</li> <li>The holes were drilled from east to west to test a steeply east dipping foliation in the limited rock exposures seen in the area. The mineralisation lies within what has been interpreted to be a ductile shear zone which would suggest that mineralisation should lie parallel to foliation.</li> </ul>
Diagrams  Balanced	<ul> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> <li>Accuracy and quality of surveys used to</li> </ul>	Appropriate diagrams relevant to material results are shown in the body of this announcement.       All drill hole and trench collar locations
Reporting	locate drill holes (collar and down-hole	were surveyed utilising handheld GPS



Criteria	JORC Code explanation	Commentary
	surveys), trenches, mine workings and other locations used in Mineral Resource estimation.  • Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	methods. Exploration results only being reported. No Mineral Resource exists  • Drilling teams utilised the Reflex EZ-shot instrument to measure deviations in azimuth and inclination angles for all holes; however, vertical holes were not surveyed. The first measurement is taken at 6 m depth, and then at approximately every 30m depth interval and at the end of the hole. being reported
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples - size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	All relevant exploration data is either reported in this announcement or has been reported previously by Aurum, Randgold or Predictive Discovery and is referred to in the announcement.
Further work	<ul> <li>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large- scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul> <li>The Company intends to continue exploration on the project and this work will include auger, aircore, RC and diamond core drilling, along with further geophysical surveys and geochemical sampling programs.</li> <li>Diagrams included in body of report as deemed appropriate by competent person</li> </ul>