

## Massan Indicated Conversion Programme Continues to Deliver, and Inferred Extension Programme Returns 54m @ 2.3 g/t Au, Confirming Continuity of the NE High-Grade Extension

West African gold explorer Asara Resources Limited (ASX: AS1; **Asara** or **Company**) is pleased to announce the latest set of results from 6 drill holes (totalling 1,266m) from the Phase 1 Reverse Circulation (**RC**) and Diamond Drilling (**DD**) program within the Massan deposit Mineral Resource Estimate (**MRE**) area at its flagship Kada Gold Project (**Kada**) in Guinea.

The Company is also pleased to report the next set of results from 14 drill holes (totalling 1,038m) from the Phase 2 Air Core (**AC**) and RC drilling program at the Massan deposit that is designed to increase the extents of the Massan deposit and grow the Kada Project Inferred Resource.

### HIGHLIGHTS:

- Notably, the **Phase 2** Inferred Extension Programme has delivered a material result from drillhole **MSRC26-013**, which returned **54 m @ 2.3 g/t Au from 42 m**. The hole targeted the mapped regional NE-trending D2 structure at its intersection with the primary N-S D1 structural trend, testing whether this high-grade structural corridor extends beyond the limits previously defined by historical drilling at Massan. **The drill hole ended in mineralisation.**

These results **confirm the continuation of the high-grade NE structural corridor**. No deeper drilling has been completed to the northeast beyond this drill hole, with only limited historical shallow air core (**AC**) drilling having been completed, drilling which was sub-optimally orientated relative to the interpreted structure.

- Asara applies an iterative, geology-driven approach to exploration, whereby structural interpretations are systematically tested and refined through drilling. As such the **outcome of MSRC26-013 supports the addition of further high-priority drillholes to the Phase 1 Indicated Conversion** programme, targeting potential conversion of this high-grade extension for future consideration into Indicated Mineral Resources.
- The results of MSRC26-013 underscores the limited drilling density outside the known central core of Massan. **The Company will continue systematic section-by-section drilling, targeting mineralisation continuity to depths of at least 250 m.**
- The **Phase 1** results continue to demonstrate **continuity between drillholes**, reinforcing confidence in the **geological model** and confirming **consistent broad zones of continuous mineralisation** growing the down-dip extent of the Massan deposit.
- Notable gold intersections** from the assays received for the most recent Phase 1 and Phase 2 drillholes reported in this press release include:

**Phase 2 Inferred Extension Programme Standout Result:**

- **MSRC26-013:** **54 m @ 2.3 g/t gold** from 42m. Including,  
12 m @ 3.6 g/t gold from 42m, and  
4 m @ 3.7 g/t gold from 58m, and  
4 m @ 4.8 g/t gold from 68m, and  
4 m @ 4.6 g/t gold from 78m, and  
6 m @ 1.2 g/t gold from 90m.

**Phase 2 Inferred Extension Programme Significant Results:**

- **MSAC26-012:** **3 m @ 1.6 g/t gold** from 9m.  
**5 m @ 1.0 g/t gold** from 26m.
- **MSAC26-008:** **5 m @ 1.7 g/t gold** from 60m.
- **MSRC26-012:** **4 m @ 0.8 g/t gold** from 69m. Including,  
2 m @ 1.3 g/t gold from 20m.
- **MSAC26-006:** **1 m @ 4.6 g/t gold** from 87m.

**Phase 1 Indicated Conversion Programme Significant Results:**

- **MSRC26-005:** **37 m @ 1.0 g/t gold** from 0m. Including,  
4 m @ 3.8 g/t gold from 8m, and  
6 m @ 1.4 g/t gold from 29m.  
**5 m @ 5.1 g/t gold** from 217m. Including,  
1 m @ 13.1 g/t gold from 218m, and  
1 m @ 11.2 g/t gold from 221m.
- **MSRC26-003:** **76 m @ 0.6 g/t gold** from 111m. Including,  
15 m @ 1.2 g/t gold from 131m, and  
6 m @ 1.0 g/t gold from 164m.  
**7 m @ 1.3 g/t gold** from 202m. Including,  
1 m @ 5.6 g/t gold from 202m.
- **MSRC26-007:** **23 m @ 0.8 g/t gold** from 0m. Including,  
3 m @ 2.0 g/t gold from 20m.
- **MSRC26-004:** **8 m @ 1.9 g/t gold** from 82m. Including,

1 m @ 7.1 g/t gold from 84m.  
**18 m @ 0.5 g/t gold** from 155m. Including,  
5 m @ 1.2 g/t gold from 168m.

- **MSRC26-009:** **6 m @ 1.1 g/t gold** from 0m.  
**8 m @ 1.7 g/t gold** from 89m. Including,  
4 m @ 2.0 g/t gold from 91m.

**Matt Sharples, CEO of Asara, commented:**

*"In addition to the strong results from the latest batch of Phase 1 drilling, the Phase 2 MSRC26-013 drillhole is a highly encouraging result that provides a strong validation of our structural interpretations at Massan. The drill hole confirms that the NE-SW trending D2 structure continues to host significant high-grade mineralisation, where it intersects the primary N-S D1 structural trend, beyond the limits defined by historical drilling.*

*Importantly, this area has seen very limited effective drill testing to date, with previous shallow AC drilling having not been optimally orientated to test the interpreted structural corridor. The 54 metres at 2.3 g/t Au from 42 metres, including multiple higher-grade intervals, demonstrates both thickness and grade continuity within this extension zone.*

*This result highlights the significant opportunity that remains outside the central known 'core' of the Massan deposit. Our iterative, geology-driven approach is designed to systematically test and refine these structural targets, and MSRC26-013 will directly inform the placement of additional high-priority holes within our Phase 1 Indicated Conversion programme.*

*We will continue to methodically drill out this extension on section lines, targeting continuity to depths of at least 250 metres, with the objective of expanding and upgrading the current Mineral Resource."*

## Kada Gold Project: Resource Growth and Conversion Strategy

The overall drilling strategy at Kada remains two-fold.

Firstly, the Company is focused on upgrading and increasing Indicated Mineral Resources through the systematic conversion of existing Inferred material. This includes extending the average drilling depth from approximately 140 m in the 2023 MRE to approximately 250 m (**Figure 1**). The Phase 1 Indicated Conversion Programme is designed to expand the current Indicated strike length of ~300 m to align as a minimum with the existing 1,300 m Inferred Resource footprint.

Secondly, the Company is focussing on expanding the Inferred Resource footprint along strike. Proven mineralisation has been identified along approximately 3,500 m of the N–S mineralised corridor (**Figure 1**); however, much of this strike remains historically drilled at a spacing insufficient for Inferred classification. The Phase 2 Inferred Programme is therefore designed to systematically drill this established mineralised strike to appropriate Inferred spacing.

### Summary of Phase 1 and Phase 2 Drilling Results

A plan map of the Phase 1 and Phase 2 drillholes reported in this release is presented in **Figure 2**. **Figure 3** illustrates the spatial distribution of drillhole collars symbolised by their corresponding downhole significant intercept gram-metres (Au), together with the locations of cross sections A–B and C–S (**Figure 4** and **Figure 5**). **Table 2** and **Table 3** summarise the collar coordinates and significant intercepts for the drillholes reported in this announcement.

The Phase 1 drilling continues to demonstrate broad, continuous zones of mineralisation where infill holes are targeting the conversion of Inferred material to Indicated classification. Drilling has also extended mineralisation to depths of 250 m and beyond, with numerous holes terminating in mineralisation (**Figure 4**), indicating potential for further down-dip continuity.


Phase 2 drilling has returned significant intercepts along the broader N–S mineralised corridor more than 500 m beyond the limits of the existing Inferred Resource. Most notably, MSRC26-013 returned 54 m @ 2.3 g/t Au from 42 m (**Figure 5**), confirming that the NE-trending D2 structure at its intersection with the primary D1 trend extends beyond historical drilling at Massan (**Figure 6**). Drilling to the northeast remains limited to shallow, sub-optimally oriented historical AC holes.

The result validates Asara's geology-driven exploration model, supports additional high-priority drillholes within the Phase 1 Indicated Conversion Programme, and reinforces the need for continued systematic drilling to depths of at least 250 m outside the central core of the deposit.


### Current Progress and Next Steps

Drilling activities for both Phase 1 and Phase 2 remain ongoing. A second RC rig mobilised to site on Monday, 16 February, and will operate alongside the existing RC and DD rigs to accelerate delivery of the Phase 1 Indicated Conversion Programme.


The Phase 2 campaign is being executed by a dedicated rig operating flexibly in either AC or RC mode, depending on target requirements. In addition to the three RC rigs and one DD rig currently drilling at Massan, the Company auger rig continues with a geochemical drilling programme over priority regional target areas to support further target delineation.

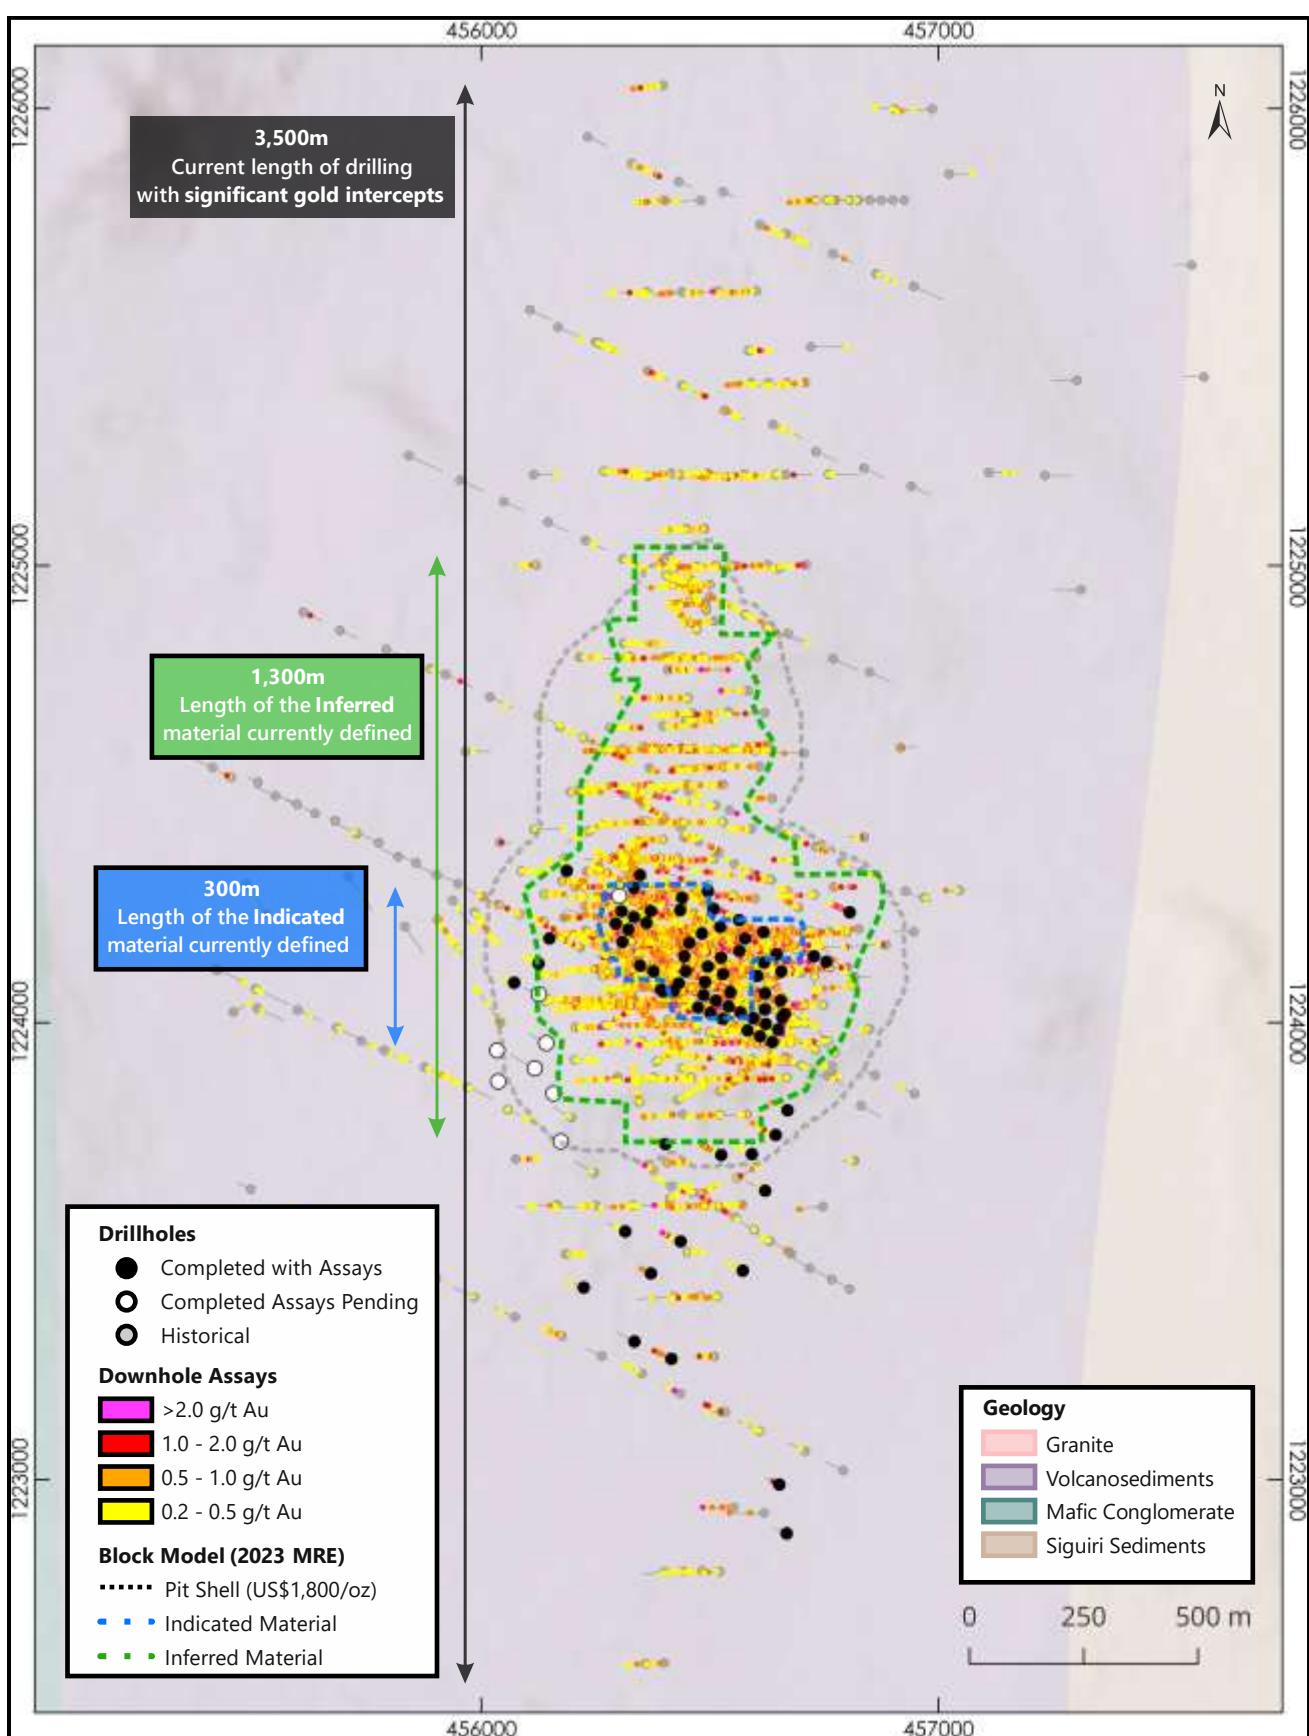


**Figure 1:** Kada gold project drill collar plan map showing potential strike extensions beyond the current MRE.

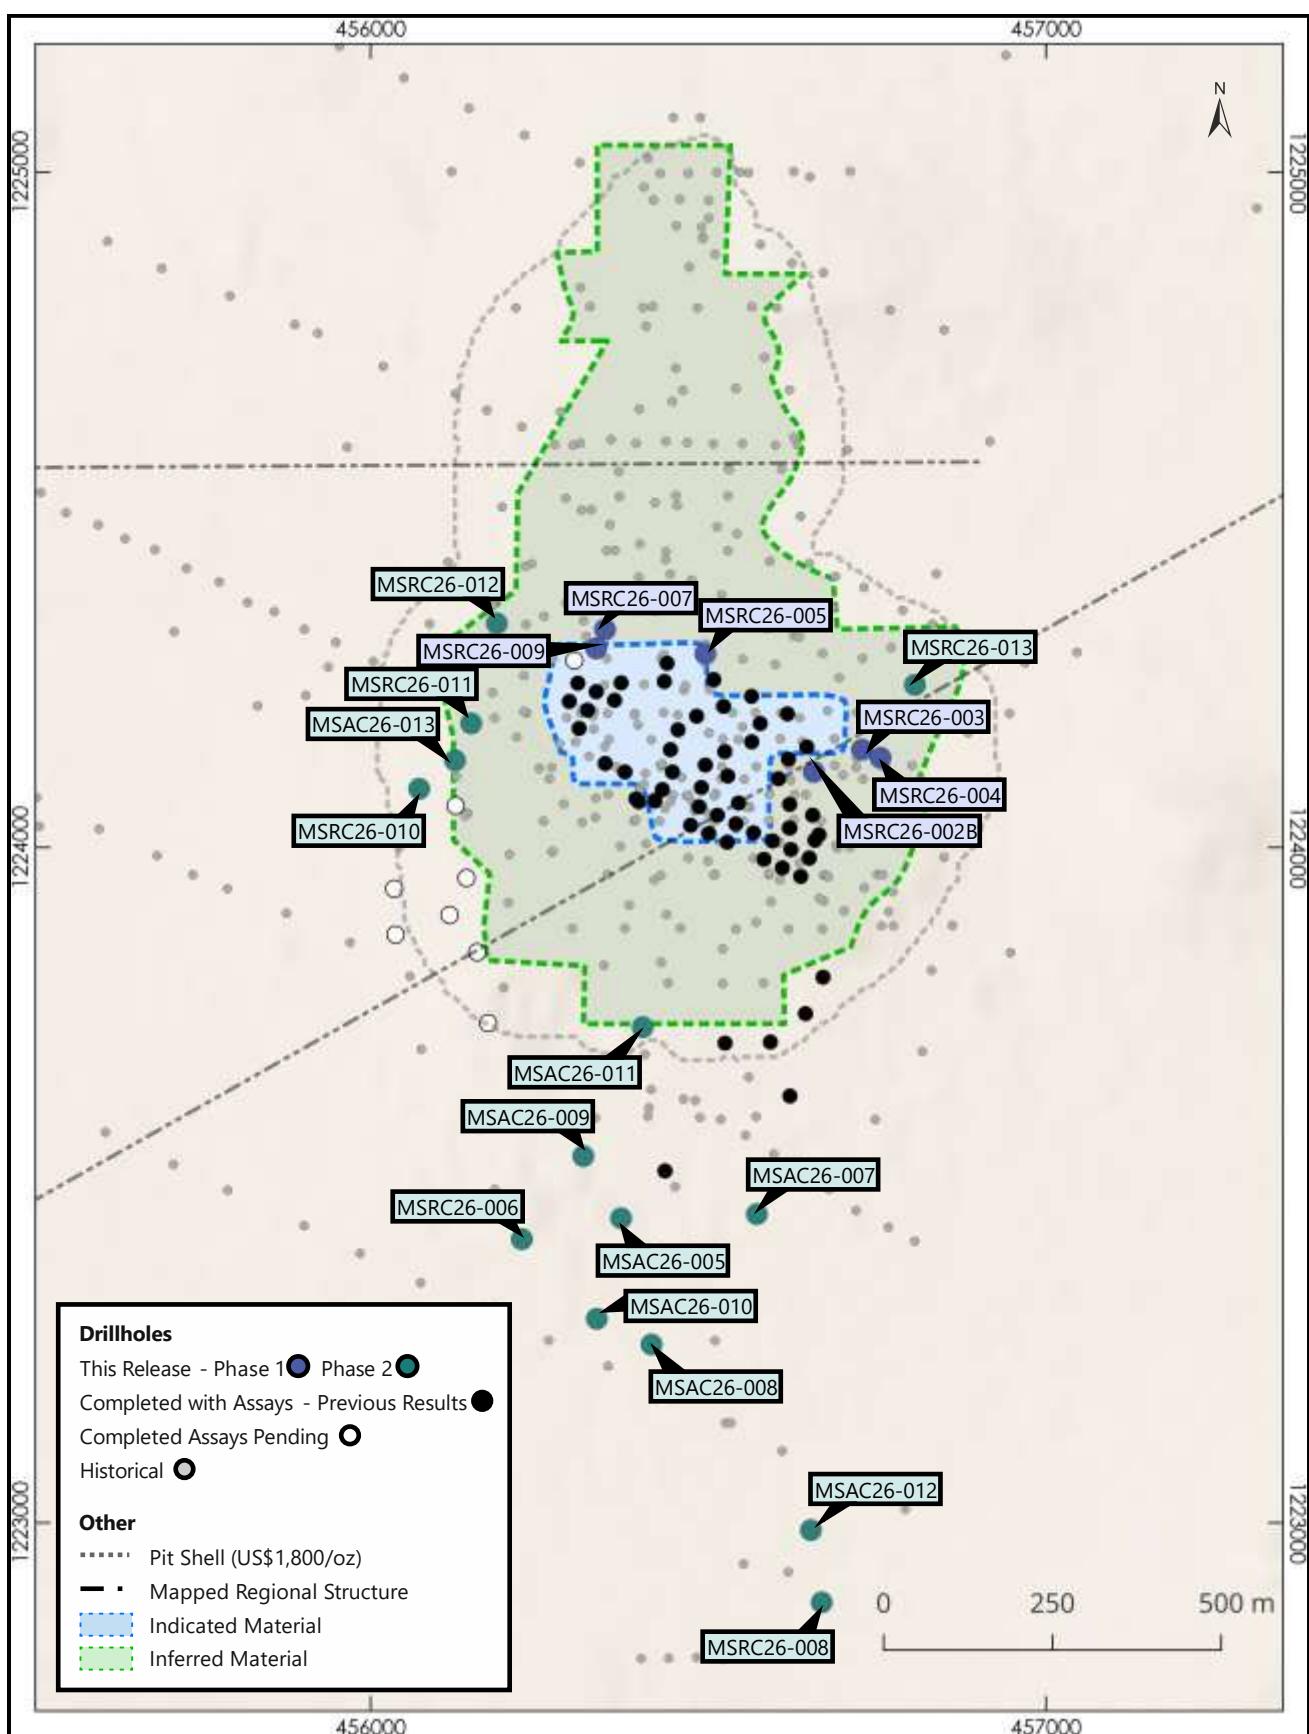


**Figure 2:** Plan map illustrating the location of the Phase 1 and Phase 2 drillholes reported in this press release.

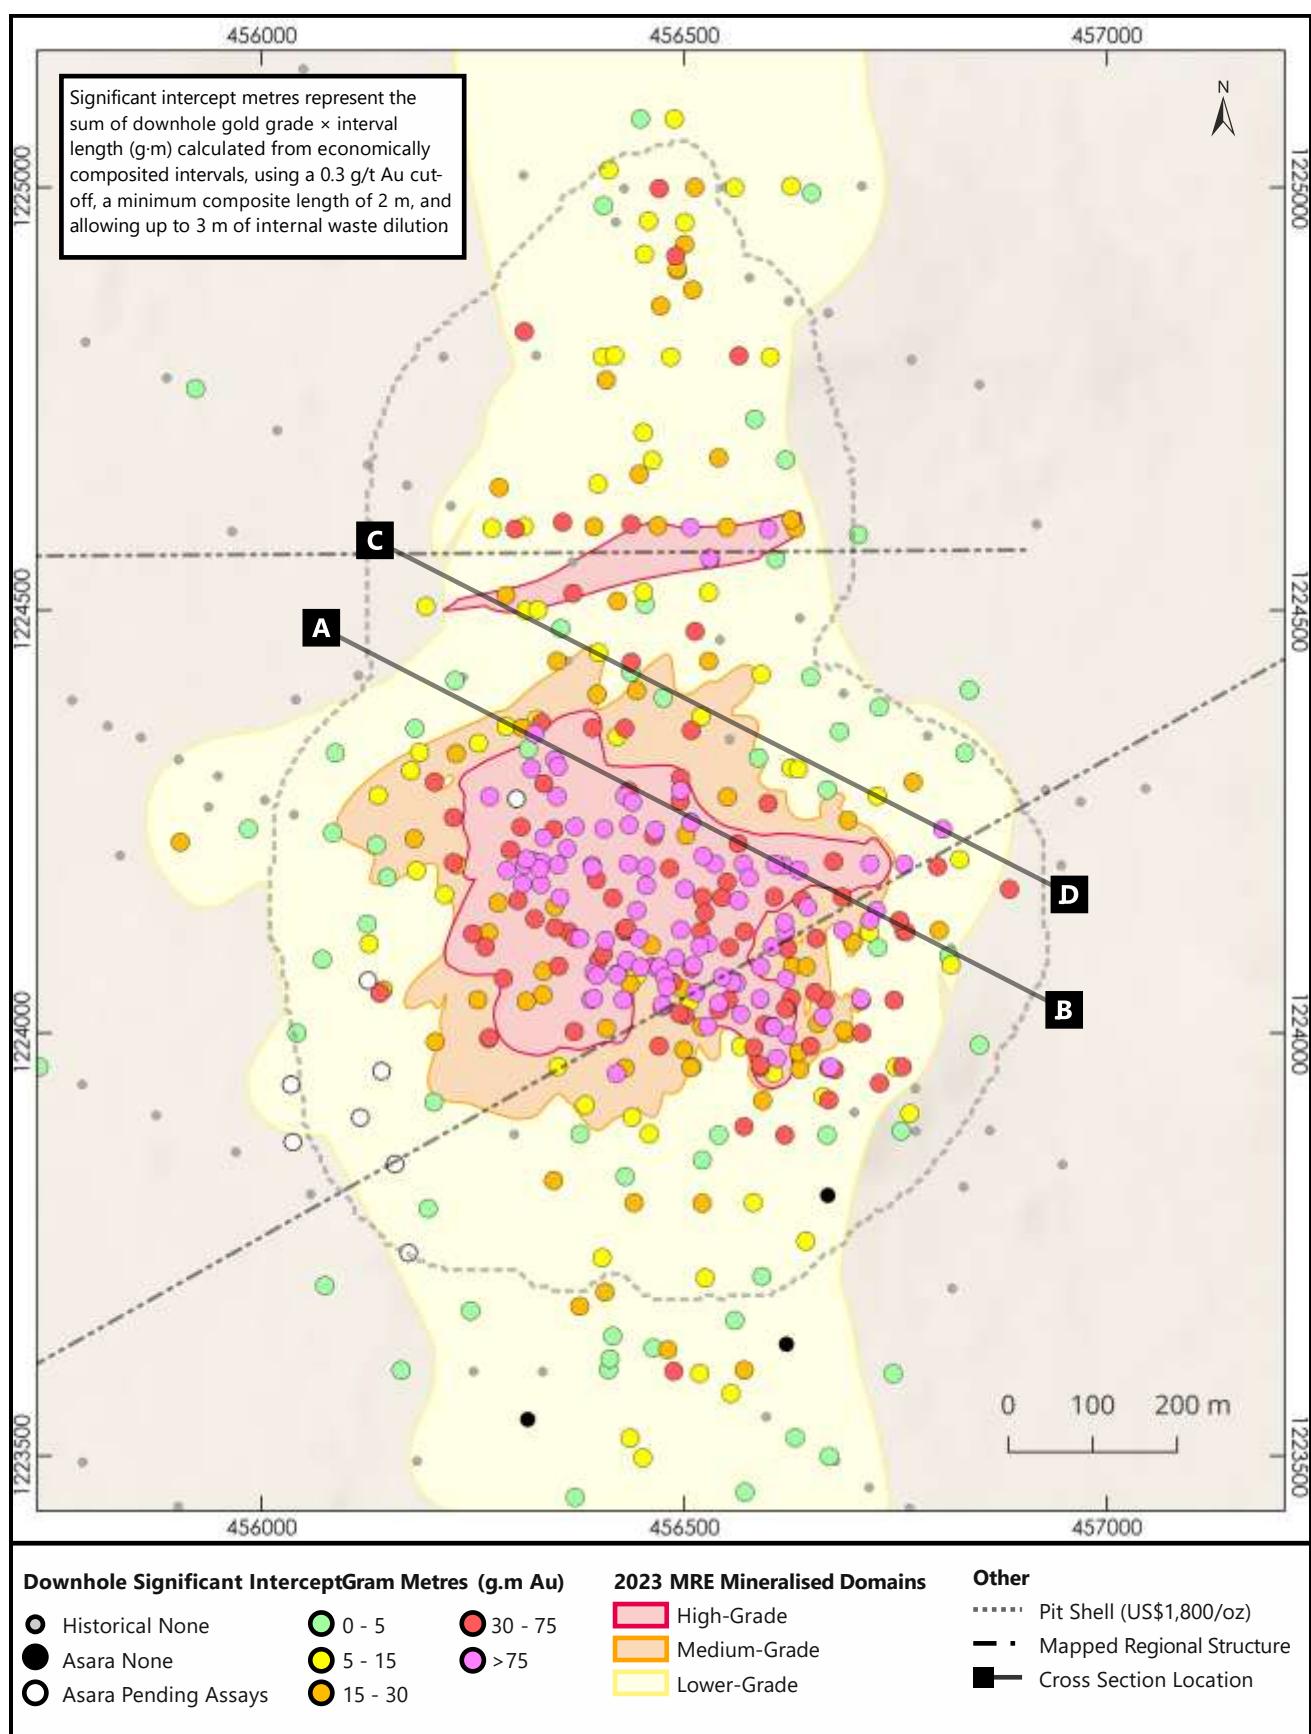


**Figure 3:** Plan map of the drill collar downhole significant intercepts g.m Au and the location of cross section AB and CD.

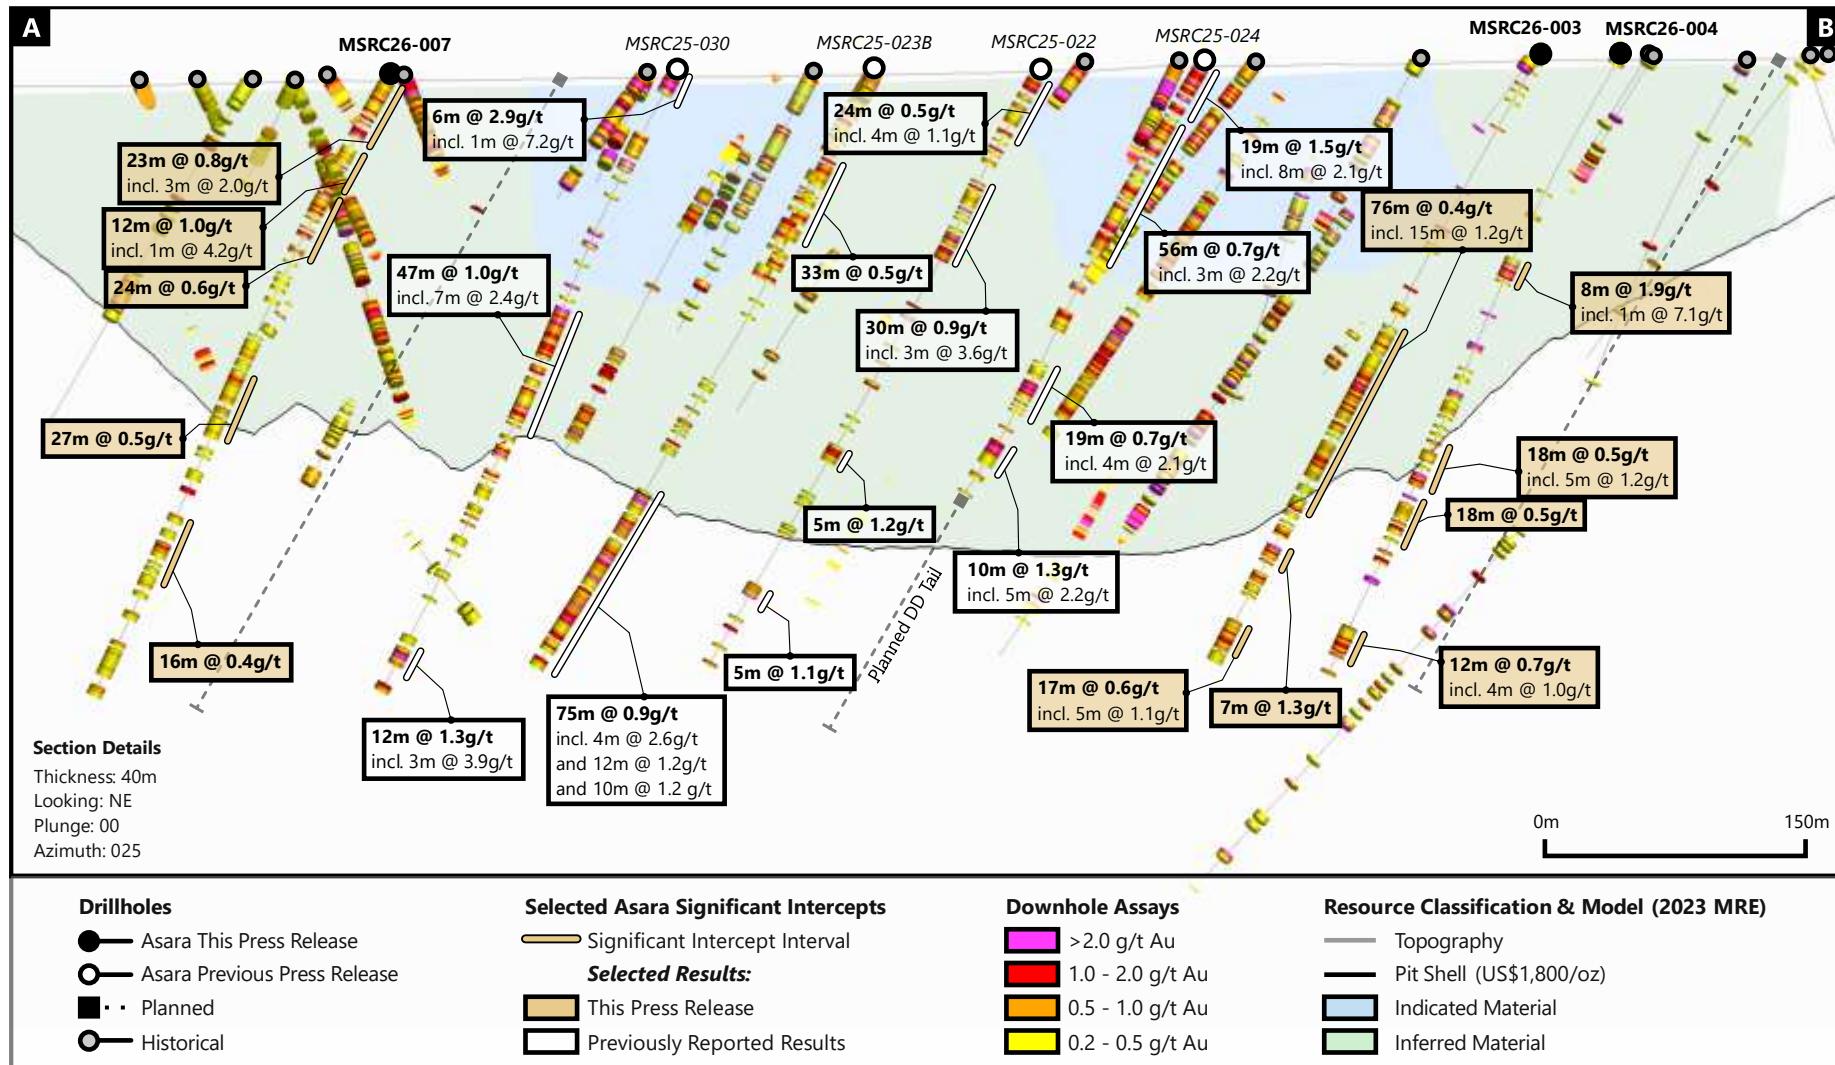

**Figure 4:** Cross section A-B indicating the existing MRE 2023 Indicated and Inferred classifications, the 2023 pit shell (US\$1,800), and recent drilling results (Intercept cut-off grade  $\geq 0.3$ g/t Au, intervals  $\geq 2$ m in length, intervals are reported with  $\leq 3$ m of continuous internal dilution).

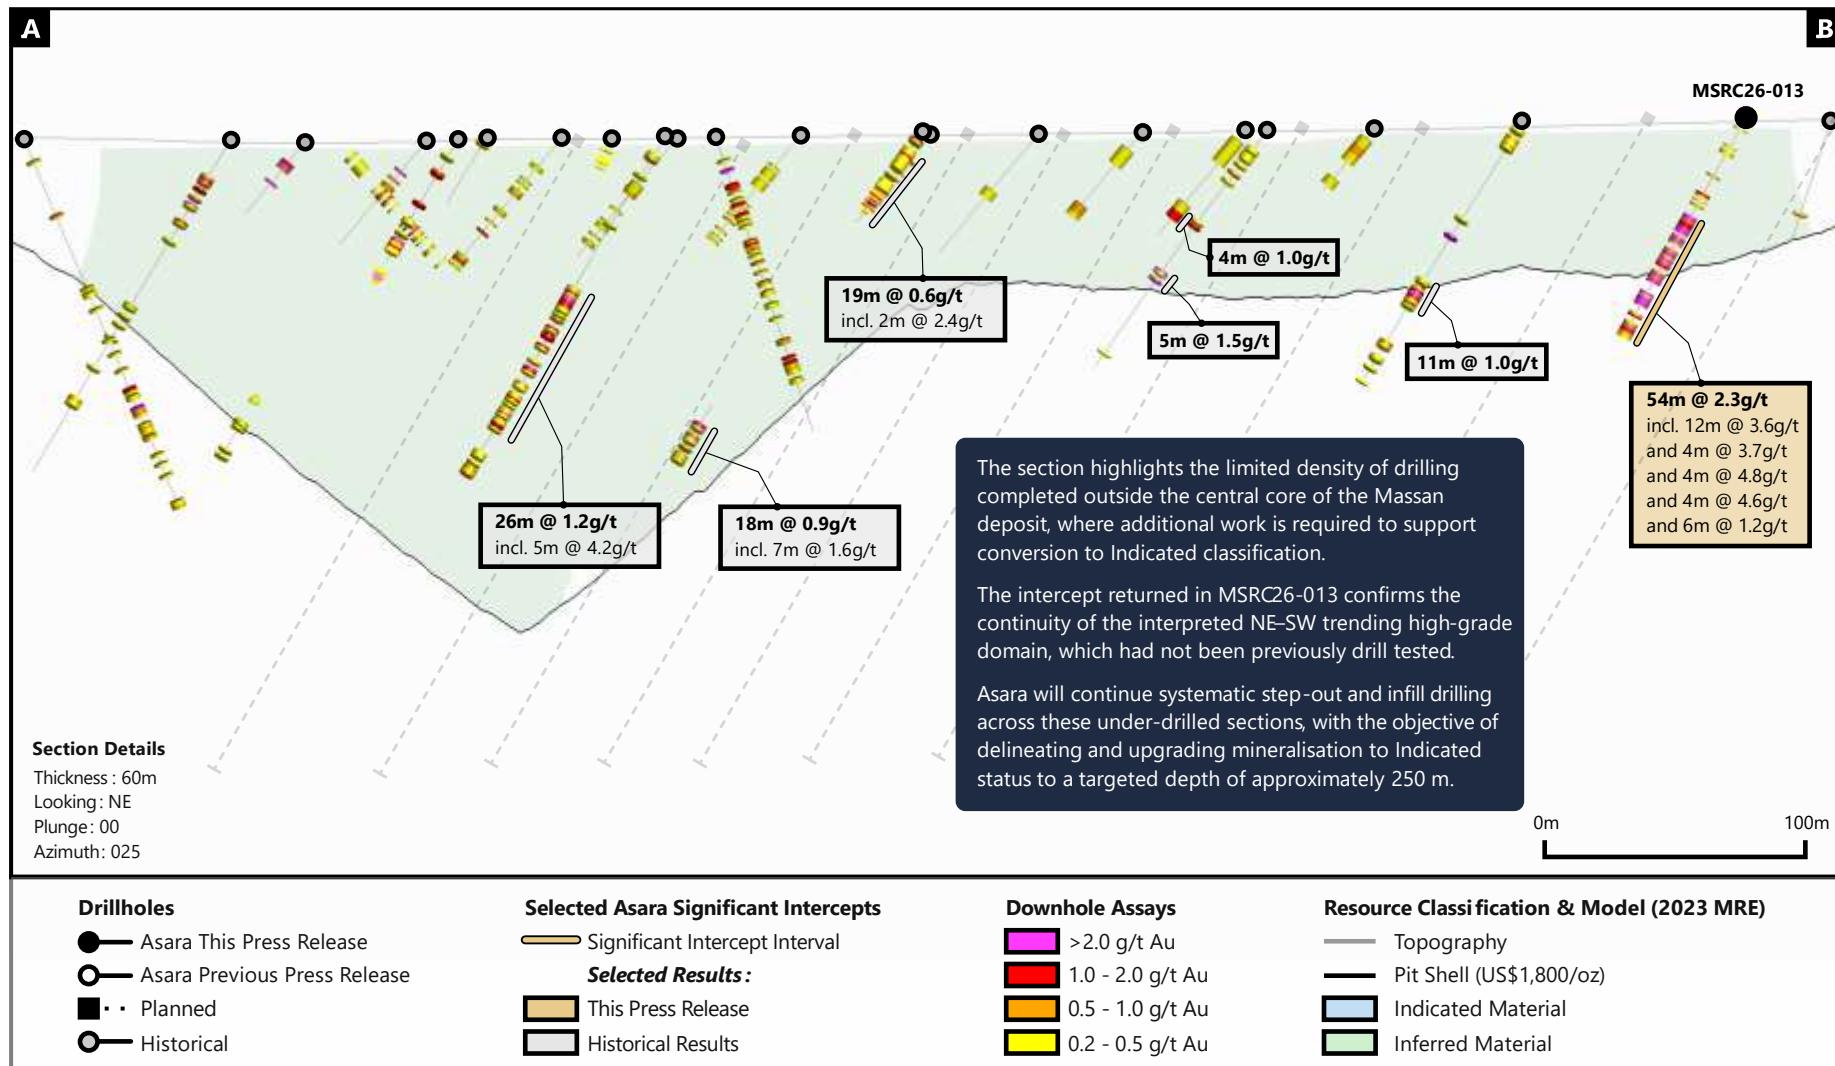

**Figure 5:** Cross section C-D indicating the existing MRE 2023 Indicated and Inferred classifications, the 2023 pit shell (US\$1,800), and recent drilling results (Intercept cut-off grade  $\geq 0.3$ g/t Au, intervals  $\geq 2$ m in length, intervals are reported with  $\leq 3$ m of continuous internal dilution).

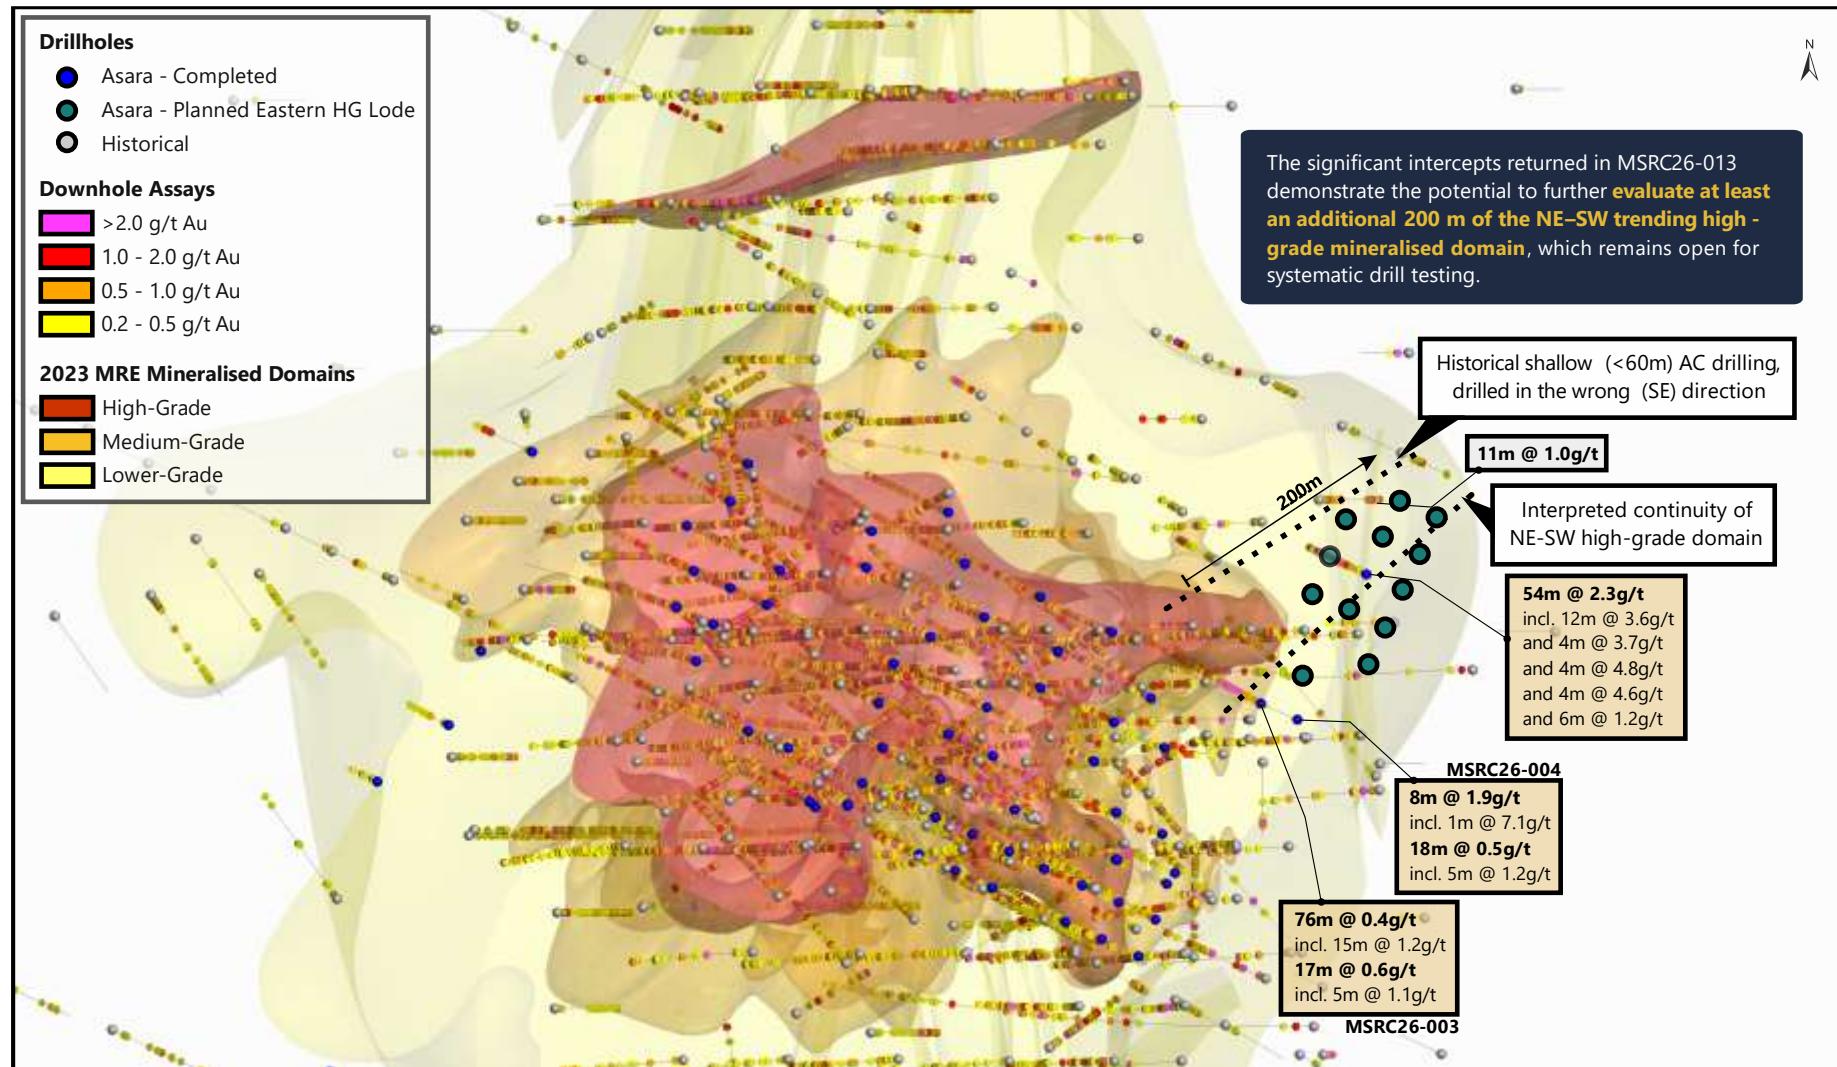

**Figure 6:** Interpreted extension of the NE high-grade zone, showing planned Phase 1 drillholes to test continuity and expand Indicated Mineral Resources within the corridor.

Contact Information:

**Matthew Sharples**  
**Chief Executive Officer**  
+44 7498 970173  
[msharples@asararesources.com](mailto:msharples@asararesources.com)

This announcement was authorised for release by the Board of Directors.

**About Asara Resources**

Asara Resources Limited is an ASX listed exploration company with a portfolio of advanced minerals projects in Guinea, West Africa and in Chile, South America.

The Company's flagship project is the advanced Kada Gold Project in eastern Guinea. Guinea remains one of the most under-explored countries in West Africa. Asara has outlined an Indicated and Inferred Mineral Resource Estimate of 30.3Mt at 1.0g/t gold for 923Koz<sup>1</sup> (**Table 1**), the majority of which is shallow oxide-transitional gold mineralisation. Asara is focussed on growing the Mineral Resource Estimate. Most of the 150km<sup>2</sup> project area remains under explored and there is considerable upside for the discovery of additional oxide gold mineralisation.

Asara also holds the Paguanta Copper and Silver–Lead–Zinc Project in northern Chile and is pursuing divestment of this asset to focus on the Kada Gold Project.

At the adjacent Loreto Copper Project in Chile, Asara has signed a US\$17m Option and Joint Venture agreement with Teck Resources Chile Limitada (**Teck**) whereby Teck can acquire up to a 75% interest in the project.

**Table 1: Kada Gold Project – 2023 JORC (2012) Mineral Resource Estimate**

DEPOSIT	MATERIAL TYPE	MEASURED		INDICATED		INFERRED		TOTAL		
		Tonnes	Grade	Tonnes	Grade	Tonnes	Grade	Tonnes	Grade	Gold Ounces
		Mt	g/t	Mt	g/t	Mt	g/t	Mt	g/t	
<b>Massan</b>	Oxide	-	-	4.6	1.07	7.28	0.93	11.88	0.99	377,000
	Transitional	-	-	1.07	0.88	3.8	0.91	4.94	0.9	143,000
	Fresh	-	-	1.25	0.9	11.65	0.93	12.9	0.93	386,000
	<b>TOTAL</b>	-	-	<b>6.92</b>	<b>1.01</b>	<b>22.8</b>	<b>0.93</b>	<b>29.72</b>	<b>0.95</b>	<b>906,000</b>
<b>Berekö</b>	Oxide	-	-	-	-	0.48	0.92	0.48	0.92	14,000
	Transitional	-	-	-	-	0.06	1.05	0.06	1.05	2,000
	Fresh	-	-	-	-	0.04	1.01	0.04	1.01	1,000
	<b>TOTAL</b>	-	-	-	-	<b>0.59</b>	<b>0.94</b>	<b>0.58</b>	<b>0.94</b>	<b>18,000</b>
<b>Total Kada Project</b>	Oxide	-	-	4.6	1.07	7.76	0.93	12.37	0.98	391,000
	Transitional	-	-	1.07	0.88	3.92	0.91	4.99	0.9	145,000
	Fresh	-	-	1.25	0.9	11.69	0.93	12.94	0.93	387,000
	<b>TOTAL</b>	-	-	<b>6.92</b>	<b>1.01</b>	<b>23.38</b>	<b>0.93</b>	<b>30.3</b>	<b>0.95</b>	<b>923,000</b>

<sup>1</sup> ASX Announcement: Kada Mineral Resource Estimate Update improves confidence; more than 40% of oxide gold now indicated dated 09 October 2023.

### **Competent Persons Statement**

The information in this press release that relates to exploration results is based on information compiled by Andrew de Klerk, who is a registered natural scientist with the South African Council for Natural Scientific Professions (SACNASP) and is a member of both the Geological Society of South Africa (GSSA) and the South African Institute of Mining and Metallurgy (SAIMM). Mr de Klerk is the VP of Exploration of Asara Resources.

Mr de Klerk has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'.

Mr de Klerk consents to the inclusion in the report of the matters based on his information, in the form and context in which they appear.

### **Mineral Resource Estimate**

The Company confirms that it is not aware of any new information or data that materially affects the information regarding the Kada Mineral Resource Estimate first reported by the Company in an ASX announcement dated 9 October 2023, and confirms that all material assumptions and technical parameters underpinning the Kada Mineral Resource estimate continue to apply and have not materially changed. The announcements are available to view at [www.asararesources.com.au](http://www.asararesources.com.au)

### **Forward Looking Statements**

Certain statements in this document are or maybe "forward-looking statements" and represent Asara's intentions, projections, expectations or beliefs concerning among other things, future exploration activities. The projections, estimates and beliefs contained in such forward-looking statements necessarily involve known and unknown risks, uncertainties and other factors, many of which are beyond the control of Asara, and which may cause Asara's actual performance in future periods to differ materially from any express or implied estimates or projections. Nothing in this document is a promise or representation as to the future. Statements or assumptions in this document as to future matters may prove to be incorrect and differences may be material. Asara does not make any representation or warranty as to the accuracy of such statements or assumptions.

**Table 2:** Collar information for drill holes reported.

Hole ID	Type	Phase	Easting (m)	Northing (m)	RL (m)	Dip (o)	Azimuth (o)	EOH (m)
<b>Phase 1 Indicated Conversion Programme:</b>								
MSRC26-002B	RC	1	456656	1224112	376	-60	295	48
MSRC26-003	RC	1	456728	1224145	374	-60	295	250
MSRC26-004	RC	1	456755	1224133	374	-60	295	250
MSRC26-005	RC	1	456496	1224287	368	-60	295	250
MSRC26-007	RC	1	456347	1224323	367	-60	295	250
MSRC26-009	RC	1	456334	1224295	368	-60	295	218
<b>Phase 2 Inferred Extension Programme:</b>								
MSAC26-005	AC	2	456371	1223451	363	-60	295	57
MSAC26-007	AC	2	456572	1223457	363	-60	295	71
MSAC26-008	AC	2	456416	1223264	360	-60	295	84
MSAC26-009	AC	2	456315	1223543	366	-60	295	80
MSAC26-010	AC	2	456335	1223302	362	-60	295	86
MSAC26-011	AC	2	456403	1223734	372	-60	295	72
MSAC26-012	AC	2	456652	1222989	356	-60	295	69
MSAC26-013	AC	2	456125	1224129	369	-60	295	79
MSRC26-006	RC	2	456224	1223420	364	-60	295	75
MSRC26-008	RC	2	456668	1222882	355	-60	295	59
MSRC26-010	RC	2	456072	1224087	369	-60	295	54
MSRC26-011	RC	2	456149	1224184	368	-60	295	51
MSRC26-012	RC	2	456187	1224332	365	-60	295	105
MSRC26-013	RC	2	456806	1224241	373	-60	295	96

**Notes:**

- MS prefix denotes drilling within Massan Prospect.
- RC means Reverse Circulation drilling
- RCD means Reverse Circulation with a diamond drill core tail.
- Co-ordinate projection UTM, WGS 84 zone 29 North.

**Table 3:** Significant intercepts from RC, AC and DD drilling reported in this Press Release

Hole ID	From (m)	To (m)	Sig. Int. Au Grade (g/t)	Regolith Type	Sample Type	
<b>PHASE 1 INDICATED CONVERSION PROGRAMME</b>						
<b>MSRC26-002B</b>	0m	2m	2m @ 2.03g/t	Oxide	RC	
<i>Drillhole abandoned at 48m</i>						
<b>MSRC26-003</b>	10m	14m	4m @ 0.41g/t	Oxide	RC	
	<b>54m</b>	<b>55m</b>	<b>1m @ 10.08g/t</b>	Oxide	RC	
	102m	105m	3m @ 0.82g/t	Oxide	RC	
	<b>111m</b>	<b>187m</b>	<b>76m @ 0.64g/t</b>			
	<i>Incl.</i>	<b>131m</b>	<b>146m</b>	<b>15m @ 1.18g/t</b>	Fresh	RC
	<i>and</i>	<b>164m</b>	<b>170m</b>	<b>6m @ 1.02g/t</b>		
	192m	197m	5m @ 0.49g/t	Fresh	RC	
	<b>202m</b>	<b>209m</b>	<b>7m @ 1.30g/t</b>	Fresh	RC	
	<i>Incl.</i>	<b>202m</b>	<b>203m</b>	<b>1m @ 5.64g/t</b>		
	214m	243m	9m @ 0.53g/t	Fresh	RC	
	<b>233m</b>	<b>250m</b>	<b>17m @ 0.64g/t</b>	<b>Fresh</b>	<b>RC</b>	
<i>Final EOH Metre</i>	<i>Incl.</i>	<b>237m</b>	<b>242m</b>	<b>5m @ 1.05g/t</b>		
<b>MSRC26-004</b>	<b>82m</b>	<b>90m</b>	<b>8m @ 1.93g/t</b>			
	<i>Incl.</i>	<b>84m</b>	<b>85m</b>	<b>1m @ 7.06g/t</b>	Oxide	RC
	<b>116m</b>	<b>118m</b>	<b>2m @ 5.58g/t</b>	Oxide	RC	
	135m	144m	9m @ 0.88g/t			
	<i>Incl.</i>	135m	136m	1m @ 4.23g/t	Fresh	RC
	<b>155m</b>	<b>173m</b>	<b>18m @ 0.54g/t</b>			
	<i>Incl.</i>	<b>168m</b>	<b>173m</b>	<b>5m @ 1.22g/t</b>	Fresh	RC
	177m	195m	18m @ 0.53g/t	Fresh	RC	
	199m	204m	5m @ 0.55g/t	Fresh	RC	
	210m	212m	2m @ 2.53g/t	Fresh	RC	
	<b>230m</b>	<b>242m</b>	<b>12m @ 0.67g/t</b>			
	<i>Incl.</i>	<b>236m</b>	<b>240m</b>	<b>4m @ 1.01g/t</b>	Fresh	RC
<b>MSRC26-005</b>	<b>0m</b>	<b>37m</b>	<b>37m @ 0.96g/t</b>			
	<i>Incl.</i>	<b>8m</b>	<b>12m</b>	<b>4m @ 3.76g/t</b>	Oxide	RC
	<i>and</i>	<b>29m</b>	<b>35m</b>	<b>6m @ 1.42g/t</b>		
	48m	50m	2m @ 0.85g/t	Oxide	RC	
	62m	64m	2m @ 0.83g/t	Oxide	RC	
	70m	78m	8m @ 0.31g/t	Fresh	RC	
	84m	90m	6m @ 0.43g/t	Fresh	RC	
	94m	97m	3m @ 0.46g/t	Fresh	RC	
	119m	121m	2m @ 1.13g/t	Fresh	RC	
	130m	132m	2m @ 1.97g/t	Fresh	RC	

Hole ID	From (m)	To (m)	Sig. Int. Au Grade (g/t)	Regolith Type	Sample Type
<b>PHASE 1 INDICATED CONVERSION PROGRAMME</b>					
<b>MSRC26-005</b>	<b>217m</b>	<b>222m</b>	<b>5m @ 5.12g/t</b>		
<i>Incl.</i>	<b>218m</b>	<b>219m</b>	<b>1m @ 13.13g/t</b>	Fresh	RC
<i>and</i>	<b>221m</b>	<b>222m</b>	<b>1m @ 11.16g/t</b>		
	235m	240m	5m @ 0.82g/t	Fresh	RC
<b>MSRC26-007</b>	<b>0m</b>	<b>23m</b>	<b>23m @ 0.79g/t</b>		
<i>Incl.</i>	<b>20m</b>	<b>23m</b>	<b>3m @ 2.00g/t</b>	Oxide	RC
	<b>30m</b>	<b>42m</b>	<b>12m @ 1.01g/t</b>		
<i>Incl.</i>	<b>40m</b>	<b>41m</b>	<b>1m @ 4.24g/t</b>	Oxide	RC
	47m	71m	24m @ 0.58g/t	Oxide	RC
	107m	114m	7m @ 0.52g/t	Oxide	RC
	119m	146m	27m @ 0.45g/t	Oxide	RC
	166m	168m	2m @ 1.29g/t	Fresh	RC
	177m	193m	16m @ 0.39g/t	Fresh	RC
	198m	210m	12m @ 0.35g/t	Fresh	RC
	228m	248m	20m @ 0.34g/t	Fresh	RC
<b>MSRC26-009</b>	<b>0m</b>	<b>6m</b>	<b>6m @ 1.12g/t</b>	Oxide	RC
	13m	17m	4m @ 0.64g/t	Oxide	RC
	23m	48m	25m @ 0.66g/t		
<i>Incl.</i>	33m	35m	2m @ 1.49g/t	Oxide	RC
<i>and</i>	37m	39m	2m @ 1.33g/t		
	56m	60m	4m @ 0.33g/t	Oxide	RC
	70m	83m	13m @ 0.76g/t		
<i>Incl.</i>	78m	80m	2m @ 1.46g/t	Oxide	RC
	<b>89m</b>	<b>97m</b>	<b>8m @ 1.68g/t</b>		
<i>Incl.</i>	<b>91m</b>	<b>95m</b>	<b>4m @ 2.02g/t</b>	Oxide	RC
	100m	103m	3m @ 0.30g/t	Oxide	RC
	108m	114m	6m @ 0.37g/t	Oxide	RC
	119m	125m	6m @ 0.35g/t	Oxide	RC
	132m	134m	2m @ 0.95g/t	Oxide	RC
	168m	177m	8m @ 0.84g/t		
<i>Incl.</i>	169m	171m	2m @ 2.25g/t	Fresh	RC

Hole ID	From (m)	To (m)	Sig. Int. Au Grade (g/t)	Regolith Type	Sample Type
<b>PHASE 2 INFERRED EXTENSION PROGRAMME</b>					
<b>MSAC26-004</b>	<i>No Significant Intercepts</i>				
<b>MSAC26-005</b>	39m	49m	10m @ 0.34g/t	Oxide	AC
<b>MSAC26-006</b>	1m	8m	7m @ 0.33g/t	Oxide	AC
	22m	24m	2m @ 0.41g/t	Oxide	AC
	38m	40m	2m @ 0.78g/t	Oxide	AC
	60m	67m	7m @ 0.48g/t	Oxide	AC
<i>Final EOH Metre</i>	<b>87m</b>	<b>88m</b>	<b>1m @ 4.60g/t</b>	Oxide	AC
<b>MSAC26-007</b>	6m	12m	6m @ 0.48g/t	Oxide	AC
	25m	27m	2m @ 0.49g/t	Oxide	AC
<b>MSAC26-008</b>	39m	40m	1m @ 3.03g/t	Oxide	AC
	49m	54m	5m @ 0.69g/t	Oxide	AC
	<b>60m</b>	<b>65m</b>	<b>5m @ 1.69g/t</b>	Oxide	AC
	70m	72m	2m @ 0.43g/t	Oxide	AC
	82m	84m	2m @ 0.91g/t	Oxide	AC
<i>Final EOH Metre</i>					
<b>MSAC26-009</b>	<i>No Significant Intercepts</i>				
<b>MSAC26-010</b>	<i>No Significant Intercepts</i>				
<b>MSAC26-011</b>	18m	23m	5m @ 0.50g/t	Oxide	AC
	41m	46m	5m @ 0.55g/t	Oxide	AC
<b>MSAC26-012</b>	<b>9m</b>	<b>12m</b>	<b>3m @ 1.56g/t</b>	Oxide	AC
	<b>26m</b>	<b>31m</b>	<b>5m @ 1.02g/t</b>	Oxide	AC
<b>MSAC26-013</b>	2m	7m	5m @ 0.42g/t	Oxide	AC
<b>MSRC26-006</b>	<i>No Significant Intercepts</i>				
<b>MSRC26-008</b>	<i>No Significant Intercepts</i>				
<b>MSRC26-010</b>	23m	25m	2m @ 0.61g/t	Oxide	RC
<b>MSRC26-011</b>	0m	3m	3m @ 0.50g/t	Oxide	RC
<b>MSRC26-012</b>	2m	5m	3m @ 0.66g/t	Oxide	RC
	<b>69m</b>	<b>73m</b>	<b>4m @ 0.81g/t</b>	Oxide	RC
	<i>Incl.</i>	<b>69m</b>	<b>71m</b>	<b>2m @ 1.27g/t</b>	
		80m	81m	1m @ 1.17g/t	Oxide
<b>MSRC26-013</b>	32m	38m	6m @ 0.51g/t	Oxide	RC
<i>incl. 3m no sample</i>	<b>42m</b>	<b>96m</b>	<b>52m @ 2.26g/t</b>		
	<i>Incl.</i>	<b>42m</b>	<b>54m</b>	<b>12m @ 3.56g/t</b>	
	<i>and</i>	<b>58m</b>	<b>62m</b>	<b>4m @ 3.65g/t</b>	Oxide
	<i>and</i>	<b>68m</b>	<b>72m</b>	<b>4m @ 4.82g/t</b>	RC
	<i>and</i>	<b>78m</b>	<b>82m</b>	<b>4m @ 4.64g/t</b>	
<i>Final EOH Metre</i>	<i>and</i>	<b>90m</b>	<b>96m</b>	<b>6m @ 1.23g/t</b>	

## Appendix 1: JORC Code (2012 Edition), Assessment and Reporting Criteria

### Section 1: Sampling Techniques and Data

Criteria	JORC Code Explanation	Explanation
Sampling Techniques	<p>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</p>	<p>The sampling described in this report refers to reverse circulation (RC), air core (AC) diamond (DD) drilling.</p> <p>All techniques and procedures described for RC drilling are equally applicable to AC drilling.</p> <p>Samples were all collected by qualified geologists or under the supervision of geologists.</p> <p>The samples are deemed representative of the rock being drilled.</p> <p>Sampling is conducted in accordance with QA/QC procedures in line with industry standards.</p> <p>RC drilling samples were obtained via a face-sampling hammer, with drill cuttings returned to surface through a cyclone. Samples were collected on nominal 1 m intervals and split at the rig using a 3-tier riffle splitter to produce a representative sub-sample for laboratory analysis. Drill chip samples were collected in numbered plastic bags, with bulk reject material retained on site.</p> <p>DD sampling was undertaken using diamond core drilling with (PQ/HQ) core size. Core was recovered in core trays and transported to a secure core facility for geological logging and sampling. Sampling intervals were defined by geological boundaries or nominal 1 m intervals where appropriate. Samples were typically taken as half-core, with the remaining half retained for reference</p>
	<p>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</p>	<p>Sampling is guided by Asara's protocols and Quality Assurance and Quality Control procedures, in accordance with industry standards.</p> <p>Sample representivity was ensured using a face-sampling drilling hammer and a well-maintained cyclone and riffle splitter system, which was cleaned regularly to minimise contamination. Drill parameters were adjusted where necessary in wet or broken ground to optimise sample recovery. Sample weights and moisture content were monitored visually, and intervals exhibiting poor recovery or potential contamination were noted during logging. Measures were taken to prevent the collection of wet RC samples. Field duplicates were routinely collected every 20<sup>th</sup> sample to monitor sampling precision.</p> <p>Diamond core recovery was monitored and recorded for each run, with core loss documented and considered during geological interpretation. Core was oriented where practicable to improve structural data quality. Core was cut using a diamond saw, with the upper (top) half of the core consistently sampled to ensure a non-biased and non-selective sampling approach. The remaining half-core was retained for reference and future verification. Quarter-core sampling was undertaken selectively for duplicate samples to assess sampling precision.</p> <p>No portable analytical devices (e.g. handheld XRF or downhole sondes) were used to determine reportable gold assay results. All analytical results are derived from certified laboratory</p>

Criteria	JORC Code Explanation	Explanation
	Aspects of the determination of mineralisation that are Material to the Public Report.	<p>methods. Laboratory instruments were calibrated in accordance with the laboratory's internal QA/QC procedures and accreditation standards.</p> <p>Mineralisation was determined through laboratory assay of RC and diamond drill samples for gold using a 50 g fire assay with Atomic Absorption Spectrometry (AAS) finish.</p> <p>Samples were initially crushed using a jaw crusher, followed by secondary crushing to achieve 90% passing –2 mm using a RSD Boyd crusher. A 250–300 g split was then pulverised using either an LM2 or ALSTO ring mill to produce a pulp with a nominal 85% passing –75 µm, suitable for fire assay analysis.</p> <p>Sampling intervals, methods and QA/QC procedures are considered appropriate for the style of mineralisation and stage of exploration.</p> <p>The sampling approach provides sufficient confidence in the representivity and quality of the assay data to support the reporting of exploration results and, where applicable, Mineral Resource estimation. No material biases related to sampling techniques, sample recovery, or analytical methodology have been identified.</p>
Drilling Techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).	<p>RC drilling was undertaken using a face-sampling hammer with 139.7 mm (5½-inch) drill rods. Drilling was completed by experienced contractors employing standard industry practices to minimise downhole contamination and maintain sample integrity, including appropriate hole cleaning and equipment maintenance.</p> <p>Diamond drilling was undertaken using HQ triple-tube core barrels where ground conditions warranted, in order to maximise core recovery and preserve sample quality. Core orientation tools were used where practicable, particularly in fresh rock, to support the collection of reliable structural data.</p> <p>Drill hole collar locations were recorded using handheld GPS with an estimated positional accuracy of approximately ±5 m. Coordinates were collected in the WGS84 datum, UTM Zone 29N.</p> <p>The majority of drill holes were planned with an inclination of approximately –60° and an azimuth of 295°. Drill orientations were determined based on a drill hole orientation and spacing study completed by Micon International Ltd, which concluded that this orientation was optimal for intersecting the interpreted multiple vein sets associated with the mineralisation.</p> <p>Downhole surveys were completed where practicable at nominal 30 m intervals down hole to accurately define drill hole trajectories and support geological interpretation and data integrity.</p>
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed.	<p>RC sample recovery was assessed qualitatively through visual inspection of drill returns at the cyclone and monitoring of sample volume and condition. Sample moisture, degree of fines, and any evidence of sample loss or contamination were recorded during geological logging. Intervals with poor recovery or compromised sample quality were noted in the database and considered during interpretation.</p> <p>Diamond core recovery was measured and recorded for each drill run, with recovery expressed as a percentage of the drilled interval. Core loss zones were clearly documented during</p>

Criteria	JORC Code Explanation	Explanation
	Measures taken to maximise sample recovery and ensure representative nature of the samples.	<p>logging. Rock Quality Designation (RQD) and core condition were also recorded to assist in assessing sample quality and geological confidence.</p> <p>RC drilling utilised a face-sampling hammer to improve sample representivity. The RC rig was equipped with an auxiliary compressor and air boosters to assist in maintaining dry, high-quality samples, particularly in zones of elevated groundwater inflow. Drill parameters were adjusted where necessary to optimise recovery. Where wet samples were encountered and sample quality could not be adequately maintained, RC drilling was temporarily discontinued until conditions improved, thereby minimising the risk of sample degradation or contamination.</p> <p>Diamond drilling employed HQ triple-tube core barrels in areas of poorer ground conditions to maximise recovery. Core handling procedures were designed to minimise breakage and loss, including careful extraction, transport and storage. Core was cut using a diamond saw, with the upper half of the core consistently sampled to ensure a representative and non-selective sampling approach.</p>
	Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	<p>No relationship is considered to exist between sample recovery and assay grade for either RC or diamond drilling. Review of recovery data against assay results indicates that acceptable sample recoveries were achieved using RC drilling methods, and no sample bias is interpreted to have occurred due to preferential loss or gain of fine or coarse material. Reduced recoveries observed locally within the transition zone have not been shown to materially influence reported grades. Overall, the sampling and recovery methods are considered appropriate for the style of mineralisation and the reporting of Exploration Results and, where applicable, Mineral Resources.</p>
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	<p>Logging of RC drill chips recorded lithology, mineralogy, mineralisation, weathering, alteration, colour and other relevant geological features. RC logging was completed by qualified geologists using a standardised logging system designed to ensure consistency and repeatability across the drill programme.</p> <p>Diamond drill core was logged in detail by qualified geologists for lithology, alteration, mineralisation, weathering, veining and structure. Geotechnical logging, including core recovery and RQD, was completed to support geological interpretation and future mining and engineering studies.</p> <p>All geological logging and associated sampling information were captured and stored in Sequent's MX Deposit geological database. The level of logging detail achieved is considered appropriate for the style of mineralisation and the Resource category being reported, and is sufficient to support Exploration Results reporting and, where applicable, Mineral Resource estimation.</p>
	Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.	<p>RC chip logging was primarily qualitative, based on visual assessment of drill chips. RC chip trays were systematically prepared and photographed to provide a permanent visual record of lithological and mineralogical characteristics and to support geological interpretation and verification.</p> <p>Diamond core logging was both qualitative and quantitative. Qualitative observations included lithology, alteration and</p>

Criteria	JORC Code Explanation	Explanation
		mineralisation styles, while quantitative measurements included core recovery, RQD, structural measurements (where oriented core was available), and sample interval lengths. Diamond core trays were photographed wet and dry prior to and after sampling, providing a permanent and auditable record of core condition and geological features.
	The total length and percentage of the relevant intersections logged.	All RC and diamond drill holes were logged in full from collar to end of hole, representing 100% of drilled intervals, including both mineralised and unmineralised sections.
Sub-sampling techniques and sample preparation	If core, whether cut or sawn and whether quarter, half or all core taken.	Not applicable for RC drilling. RC drill chips were split at the rig using a riffle splitter to obtain a representative sub-sample. Diamond drill core was cut using a diamond saw. Half-core samples were taken, with the upper half of the core consistently sampled to ensure a non-selective and unbiased sampling approach. The remaining half-core was retained for reference and future verification.
	If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.	RC samples were collected via a cyclone and riffle split at the drill rig to produce a representative sub-sample. Sampling was undertaken under predominantly dry conditions. On the rare occasions where wet samples were encountered, samples were dried prior to splitting with a riffle splitter to ensure sample integrity and representivity. Where excessive groundwater inflow adversely affected sample quality and dry sampling conditions could not be maintained, RC drilling was temporarily discontinued until conditions improved.
	For all sample types, the nature, quality and appropriateness of the sample preparation technique.	Samples were transported by road to the Proslabs laboratory in Kouroussa, Guinea under standard chain-of-custody procedures. Sample preparation for all RC and diamond drill samples followed industry best practice and procedures considered appropriate for gold mineralisation  At the laboratory, all samples were weighed, dried and crushed to ~2 mm using a jaw crusher. A split of the crushed material was subsequently pulverised in a mill to achieve a nominal particle size of 90% passing 75 µm, producing a homogeneous pulp suitable for fire assay analysis.  The sample preparation procedures are considered appropriate for the grain size and style of mineralisation and suitable for the reporting of Exploration Results and, where applicable, Mineral Resource estimation.
	Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.	Asara has established protocols governing sample preparation at the laboratories and the collection and assessment of analytical data, designed to ensure that consistent and accurate procedures are applied in producing representative samples. These protocols are aligned with industry best practice and are routinely reviewed by Company personnel.  At the laboratory, crusher and pulveriser equipment were flushed with barren material at the start of each batch and cleaned with compressed air between each sample to minimise the risk of cross-contamination. These procedures are considered effective in maintaining sample integrity and ensuring the representivity and reliability of analytical results.
	Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.	Sampling was carried out in accordance with Asara's established sampling protocols, aligned with industry best practice, and designed to ensure that collected samples are representative of the in-situ material intersected by drilling.

Criteria	JORC Code Explanation	Explanation
		<p>Representative sampling was achieved through the use of a face-sampling hammer and riffle splitting for RC drilling, and consistent half-core sampling methodology for diamond drilling, with the same half of core sampled throughout the programme to avoid selective bias.</p> <p>Field quality control procedures included the routine insertion of certified reference materials (assay standards), blanks, and field duplicates into the sample stream, at an average insertion rate of approximately 1 in 20.</p> <p>QA/QC results were reviewed on a batch-by-batch basis, and assay results were only released into the Sequent MX Deposit geological database once all QA/QC checks had passed, or any identified issues had been appropriately investigated and resolved either in the field or in collaboration with the analytical laboratory.</p>
	Whether sample sizes are appropriate to the grain size of the material being sampled.	<p>The sample sizes are considered appropriate to correctly represent the style of mineralisation, the thickness and consistency of the intersections.</p>
Quality of assay data and laboratory tests	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	<p>Gold assays for RC and diamond drill samples were completed using a 50 g fire assay with Atomic Absorption Spectrometry (AAS) finish (FAA50), which is considered a total assay technique for gold. The analytical method is appropriate for the style of mineralisation and the reporting of Exploration Results and, where applicable, Mineral Resources.</p> <p>Sample preparation and assaying were undertaken following industry best practice and are considered suitable for the grain size and mineralogical characteristics of the mineralisation.</p>
	For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	<p>No geophysical tools, downhole sondes, or handheld XRF instruments were used to determine assay results reported in this Public Report. All reported analytical results are derived from certified laboratory assay methods.</p>
	Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	<p>Field quality control procedures included the routine insertion of certified reference materials (assay standards), blanks, and field duplicates into the sample stream at an average insertion rate of approximately 1 in 20.</p> <p>At the laboratory, the crusher and pulveriser were flushed with barren material at the start of each batch and cleaned with compressed air between each sample to minimise the risk of cross-contamination. Sample preparation checks for fineness were undertaken by the laboratory as part of their internal quality control procedures to confirm that the target grind size of 90% passing 75 µm was achieved.</p>
		<p>The laboratory also reports internal laboratory QA/QC results, which were reviewed alongside field QA/QC data. All QA/QC results were assessed on a batch-by-batch basis, and assay results were only released into the Sequent MX Deposit geological database once all QA/QC criteria had been met.</p> <p>Review of QA/QC performance indicates that acceptable levels of analytical accuracy and precision have been achieved, with no evidence of systematic bias.</p>
Verification of sampling and assaying	The verification of significant intersections by either independent or alternative company personnel.	<p>Significant assay results and geological interpretations were reviewed by Company senior geologists independent of the day-to-day sampling activities. Verification included checks of drill hole geology, sampling intervals, assay results, and</p>

Criteria	JORC Code Explanation	Explanation
		QA/QC performance to confirm the validity of reported intersections prior to release.
	The use of twinned holes.	None of the drill holes in this report are twinned.
	Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.	Primary geological, sampling and assay data were recorded digitally using standardised logging and sampling procedures. Data entry was subject to validation checks prior to upload into Sequent's MX Deposit geological database. Hard copy records, including drill logs, sample tickets, and laboratory certificates, are retained for verification purposes. Electronic data is stored on secure Company Sharepoint servers with controlled access.
	Discuss any adjustment to assay data.	The primary data is kept on file. There were no adjustments to the assay data.
Location of data points	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.	<p>Drill hole collar locations were initially recorded using handheld GPS with an estimated positional accuracy of approximately <math>\pm 5</math> m while drilling was ongoing. Upon completion of drilling, all drill hole collars were resurveyed using Differential GPS (DGPS), achieving a positional accuracy of approximately <math>\pm 0.1</math> m in X, Y and Z coordinates.</p> <p>Downhole surveys were completed using a north-seeking downhole gyroscopic survey tool, with measurements taken at nominal 30 m intervals, where practicable, and at the end of hole. The quality and accuracy of the downhole survey data are considered appropriate for geological interpretation and Mineral Resource evaluation.</p>
	Specification of the grid system used.	Location data was collected in UTM grid WGS84, zone 29 North.
	Quality and adequacy of topographic control.	Topographic control was established by traversing from the nearest national control point located in the town of Siguiri and by the installation of multiple concrete control points across the prospect area.
Data spacing and distribution	Data spacing for reporting of Exploration Results.	Drill hole spacing and distribution at the Massan Prospect were determined based on geological interpretation, style of mineralisation, and exploration objectives. A drill spacing study conducted by Micon International Ltd concluded that a nominal spacing of 30 m $\times$ 30 m was optimal for establishing geological and grade continuity within the prospect.
	Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	The spacing and distribution of RC and diamond drill holes are considered sufficient to demonstrate geological and grade continuity at the scale required for the Resource category being reported. Drilling density in key areas supports the interpretation of mineralised domains and provides an appropriate dataset for Mineral Resource estimation, where applicable. Diamond drilling was used selectively to provide additional geological and structural confidence.
	Whether sample compositing has been applied.	There was no sample compositing.
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	The orientation of RC and diamond drill holes was designed to intersect the interpreted mineralised structures as close to perpendicular as practicable, based on the current geological understanding of the Massan Prospect. The chosen drill orientations are considered appropriate for the style of mineralisation and are not expected to introduce significant sampling bias related to structural orientation.

Criteria	JORC Code Explanation	Explanation
	<p>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</p>	<p>The majority of drill holes were planned with an inclination of approximately <math>-60^\circ</math> and an azimuth of <math>295^\circ</math>, based on a drill hole orientation and spacing study conducted by Micon International Ltd. The study concluded that this orientation was optimal for intersecting the multiple vein sets recognised at Massan.</p> <p>No significant sampling bias related to drilling orientation has been identified. Where local deviations from optimal intersection angles may occur due to geological complexity, this is not considered to materially affect the representivity of the sampling or the interpretation of mineralisation.</p>
Sample security	<p>The measures taken to ensure sample security.</p>	<p>RC and diamond drill samples were sealed and stored securely on site following collection and prior to dispatch. Samples were then collected by laboratory staff and transported by road to the Proslabs laboratory in Kouroussa, Guinea.</p> <p>Chain-of-custody procedures were maintained throughout sample handling and transport. Bulk sample rejects and assay pulps were retained by the laboratory and/or the Company for reference, verification and potential future work. These measures are considered appropriate to ensure the security and integrity of samples from collection through to analysis.</p>
Audits or reviews	<p>The results of any audits or reviews of sampling techniques and data.</p>	<p>Asara's sampling techniques and procedures were reviewed by RPM Global prior to the release of a JORC-compliant Mineral Resource in March 2022, and were deemed appropriate for the style of mineralisation and the reporting of Mineral Resources.</p> <p>Since that review, Asara has implemented a higher frequency of QA/QC insertions, strengthening the robustness of sampling and analytical controls. QA/QC results continue to be reviewed routinely by Company personnel and, where relevant, by independent consultants. Any issues identified are investigated and resolved prior to the reporting or use of data in Mineral Resource estimation.</p>

## Section 2: Reporting of Exploration Results

Criteria	JORC Code explanation	Explanation
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.	<p>The reported drilling results are from the Kada permit, which is held under Permit A/2021/1638/MMG/SGG, located in Guinea. The Kada permit covers the Massan Prospect and associated exploration areas.</p> <p>Asara Resources Ltd has the right to earn up to a 75% interest in the Kada permit by funding a Feasibility Study, under the terms of an earn-in agreement. There are no other known joint ventures, partnerships, overriding royalties, or third-party agreements materially affecting the permit at the time of reporting.</p> <p>The Company is not aware of any material native title interests, historical sites, wilderness areas, national parks, or environmentally protected areas within the permit area that would materially impact exploration activities.</p>
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	<p>Following a country-wide review of mineral exploration licences by the Guinean Ministry of Mines, the Company has received confirmation from the Guinean authorities that its existing Kada and Bamféle licences remain in good standing. The Company anticipates that both licences will be renewed with the official launch of DAMANDA on 20 December 2025, the new digital operating platform of mining and exploration permits for Guinea that supersedes the previously closed mining cadastre.</p> <p>At the time of reporting, there are no known material impediments to maintaining tenure or to obtaining a licence to operate in the area. Exploration activities are conducted in accordance with applicable Guinean mining and environmental regulations, and the Company is not aware of any issues that would materially impact its ability to continue exploration on the Kada permit.</p>
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<p>The area currently covered by the Kada permit has undergone previous mineral exploration. Newmont conducted exploration activities on the permit between 2009 and 2012, which included regional exploration programmes typical of early-stage gold exploration.</p> <p>Details of historical work have been reviewed where available and have informed the Company's geological understanding of the area. However, the Exploration Results reported herein are based solely on drilling and sampling completed by Asara and its contractors.</p>
Geology	Deposit type, geological setting and style of mineralisation.	<p>The Kada Project covers an area of approximately 100 km<sup>2</sup> and is located within the Siguiri Basin in Guinea. The project is situated approximately 36 km along strike and to the south of the Siguiri Gold Mine, a &gt;10 Moz gold deposit operated by AngloGold Ashanti.</p> <p>Gold mineralisation at Kada is interpreted to be orogenic in style, hosted within structurally controlled shear zones and associated quartz veining developed within a variably weathered bedrock sequence. Mineralisation occurs across oxide, transition and fresh rock domains, with gold associated with multiple generations of quartz veining, sulphide development, and characteristic alteration assemblages.</p> <p>The geological setting and mineralisation style at Kada are consistent with other major gold deposits within the Siguiri Basin, supporting the prospectivity of the project and the</p>

Criteria	JORC Code explanation	Explanation
Drill hole Information	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none"> <li>• easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>• dip and azimuth of the hole</li> <li>• down hole length and interception depth</li> <li>• hole length.</li> </ul>	<p>potential for continuity of mineralisation along strike and at depth.</p> <p>Drill hole collar coordinates (easting and northing), elevations (RL), azimuths, dips, end-of-hole depths and significant intercepts are reported in the accompanying tables and figures within this announcement. Drill hole locations were surveyed using DGPS for collar positions and north-seeking gyroscopic downhole survey tools at nominal 30 m intervals, where practicable.</p> <p>Appropriate locality plan maps and supporting cross-sections accompany this announcement, illustrating drill hole locations, orientations, and the spatial relationship of reported results to geological interpretation.</p> <p>Further information relating to previous drill hole results is available on the Asara Resources Ltd website.</p> <p><a href="#">ASX Announcements – Asara Resources</a></p> <p>No material drill hole information has been omitted from this report in a manner that would render the disclosure misleading.</p>
	<p>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>	<p>There has been no exclusion of information.</p>
Data aggregation methods	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high-grades) and cut-off grades are usually Material and should be stated.</p>	<p>For the purposes of reporting significant intercepts, a cut-off grade of 0.3 g/t gold over 2 m has been applied. In calculating reported intercepts, up to 3 m (downhole) of continuous internal waste was permitted within mineralised intersections, consistent with the interpreted style of mineralisation.</p> <p>Reported intercept grades are length-weighted averages of assay results. No weighting, top-capping, or high-grade cutting techniques have been applied to the data reported in this announcement.</p> <p>Assay results are generally quoted rounded to one or two decimal places, reflecting the analytical precision of the assay method and standard industry reporting practice.</p>
	<p>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</p>	<p>Any aggregation done uses a length weighted average.</p>
	<p>The assumptions used for any reporting of metal equivalent values should be clearly stated.</p>	<p>Metal equivalent values are not reported in this announcement.</p>
Relationship between mineralisation widths and intercept lengths	<p>These relationships are particularly important in the reporting of Exploration Results.</p>	<p>The relationship between reported intercept lengths and true mineralisation widths is an important consideration in the interpretation of Exploration Results. The orientation of the mineralised zones has been established, and drilling was planned to intersect the mineralisation in a near-perpendicular manner where practicable, in order to provide representative intercepts and minimise orientation-related bias.</p>

Criteria	JORC Code explanation	Explanation
	If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.	All results are listed in down-hole lengths. The orebody is considered to be a stockwork of veins with three major orientations.
	If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	All results are listed in down-hole lengths. The orebody is considered to be a stockwork of veins with three major orientations.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Appropriate plans, sections and long sections accompany the results and illustrate drill hole locations, traces, geological interpretation and significant intercepts. Diagrams are drawn to scale and include orientation and coordinate information where relevant.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high-grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	The accompanying document is considered to represent a balanced report.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	There is no other exploration data which is considered material to the results reported in the announcement.
Further work	The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).	Further exploration and infill drilling are currently ongoing and will continue to target the Massan MRE area as well as explore extensions to the south, north and at depth.
	Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Refer to main body of this report.